

POWER FRAME

Built-in Frame & PDU

Features:

■ Compact Dimensions

The built-in frame can be installed on desk or table tops with minimum thickness of 10 (mm).

■ Ease of Integration

The PDU clicks into the built-in frame, no tools are required.

■ Timeless Design

Since the PDU can be interchanged at any time, the user is guaranteed longterm flexibility & adaptability of future requirements.



Built-in Frame

Outer dimensions: L241.5 x W73 (mm) Built-in dimensions: L224.5 x W60 (mm) Built-in depth: 35.5 (mm)

Art. No. Descriptions

317.000 Silver grey RAL9006

317.001 Stainless steel

915.000 Black RAL9005



PDU Approx. L220 (mm) 1 x Custom Module; Aluminium Profile


Art. No. Descriptions

906.0291 2 x UK90° black socket outlets
Power input: 2.0M H05VV-F3G1.5mm², BS13A plug
3.15A individually fused, child proof

916.0681 3 x US black socket outlets
Power input: 2.0M SJT3C AWG14, NEMA5-15 plug
Child-proof

916.0851 2 x CCC black socket outlets
Power input: 2.0M RVV3G1.0mm², CCC10A plug
Child-proof


916.0682 2 x Universal black socket outlets
Power input: 0.1M H05VV-F3G1.5mm², GST18i3 plug

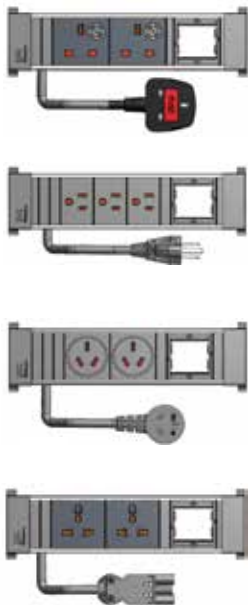

Wire Management



Assembly dimension: 225mm x 60mm

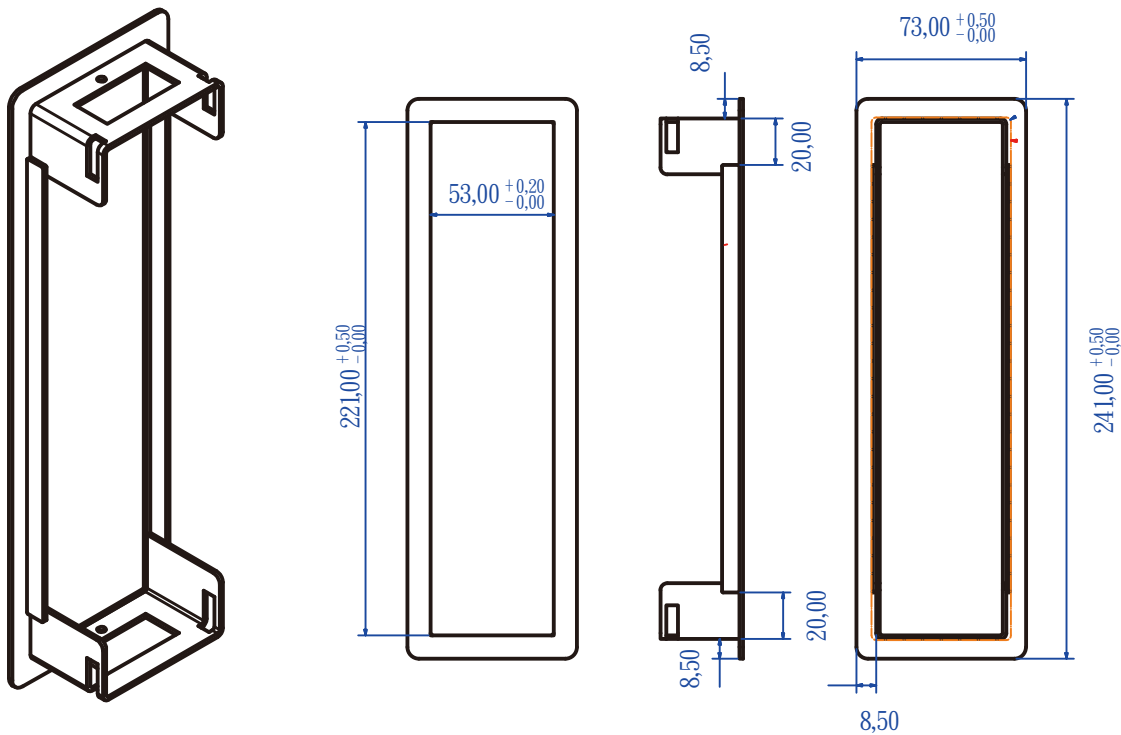

CAT6



USB3.0