



Under Cabinet / Shelf
LED Down Light & Linear Light
櫥櫃 / 層板適用 LED 嵌燈及長條燈

The Versatile Illumination for Space & Life



The Versatile Illumination for Space & Life

LED illumination is known for its advantages of low energy consumption, low voltage operation, low heat generation and high lumen output. With many decades' experience specialized in high quality hardware and space plan, Four Winds developed Xplendid LED Lighting, a versatile illumination system which functions not only as the accent light for working, reading, display, but also a brilliant choice for ambient illumination such as brewing unique atmosphere in living room, bedroom and dining room. Xplendid LED Lighting can be installed under cabinet, shelf, inside drawer and wardrobe, over cabinet, showcase, bedside and office desk, etc. It is also applicable to ceiling, cove and plinth revealing the directional or directionless lights.

Xplendid LED 照明系列

針對多元型態生活空間設計的照明產品，最能帶給使用者便利舒適的體驗。Xplendid LED 燈具內置低電壓但高效能的高級LED模組(CREE製品)，搭配其他高品質零件，發揮LED特性最佳效果，使用平均溫度低(60°C以下)，低伏特弱電使用上相對安全，具備超節能省電效果。近十年來Xplendid 已發展出全系列的櫥櫃/傢俱專門照明，以及特定性質的室內照明，提供特別機能區域品質最好的重點照明效果，增進便利的生活型態。

by Four Winds Corporation
康萊興業股份有限公司

www.xplendid.com

Xplendid® Under Cabinet / Shelf LED Light 頂級櫥櫃 / 層板 LED 照明

1. With the most efficient structure, Xplendid LED light performs lifespan as long as 50,000 hours, with 3 years guarantee

獨特結構設計使 Xplendid LED 照明更加耐用, 使用壽命達 50,000小時, 並享有三年產品保固

i) Total aluminium lighting fixture generates effective heat dissipation and keeps low working temperature at a level of 40 ~ 60°C

全鋁合金燈具結構, 提供最佳的散熱效果, 讓 LED 工作溫度保持在 40 ~ 60°C 之間

ii) All LED illumination driven by 700mA constant current DC driver maintaining consistent brightness and long lifespan

定電流裝置連結全電壓變壓器, 電流穩定, 使用壽命長, 真正節能

2. High quality LED illumination 高品質 LED 照明

i) With Cree® XLamp® LED XT-E module 採用 Cree® XLamp® LED 元件


CREE



XT-E

ii) Smooth array and glare-free illumination by high power LED with reflector or optical lens

搭配二次光學 (透鏡及反射片), 讓 LED 燈的光線亮度均勻而不刺眼, 且不產生疊影

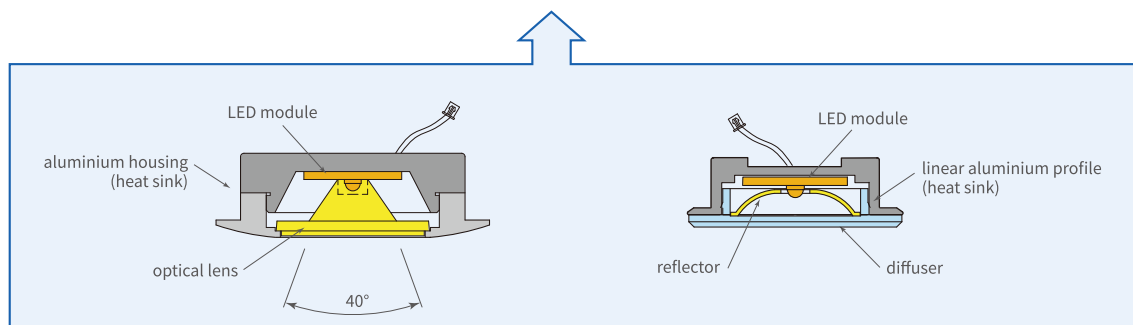

iii) High intensity white lights with 3 color temperatures



▲ Warm white (WW) - 3,000 kelvin
(3 Vdc / 0.7A = 100 lumen)



▲ Neutral white (NW) - 4,200 kelvin
(3 Vdc / 0.7A = 130 lumen)




▲ Cool white (CW) - 6,000 kelvin
(3 Vdc / 0.7A = 130 lumen)

3. Manifold applications for different purposes, functioned by innovative digital sensor switch


櫥櫃應用多元且具有功能性, 可內置新型數位感應開關

i) Kitchen Cabinet 廚房櫥櫃

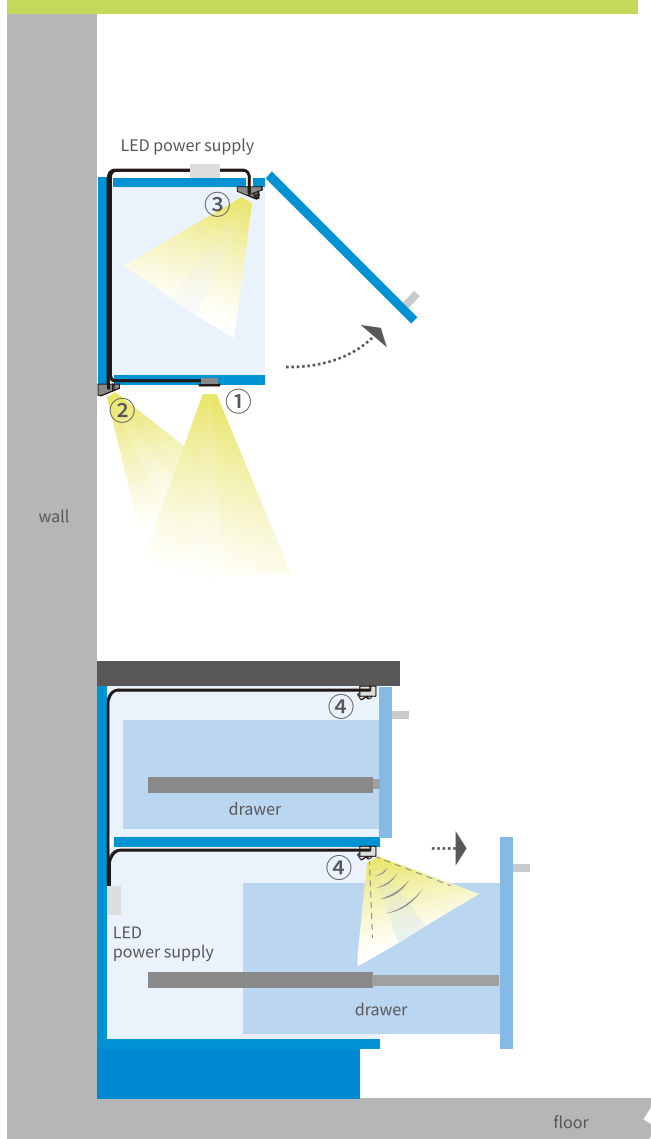


- ① Recessed mounting under cabinet (with or without hand-waving sensor switch)
- ② Corner surface mounting under cabinet (with or without sensor switch or dimmer)
- ③ Top surface mounting inside cabinet (with PIR motion detector)
- ④ Top surface mounting inside drawer (with PIR motion detector)
- ⑤ Top surface mounting under shelf (with PIR motion detector)

ii) Wardrobe / Closet 衣櫥 / 更衣室

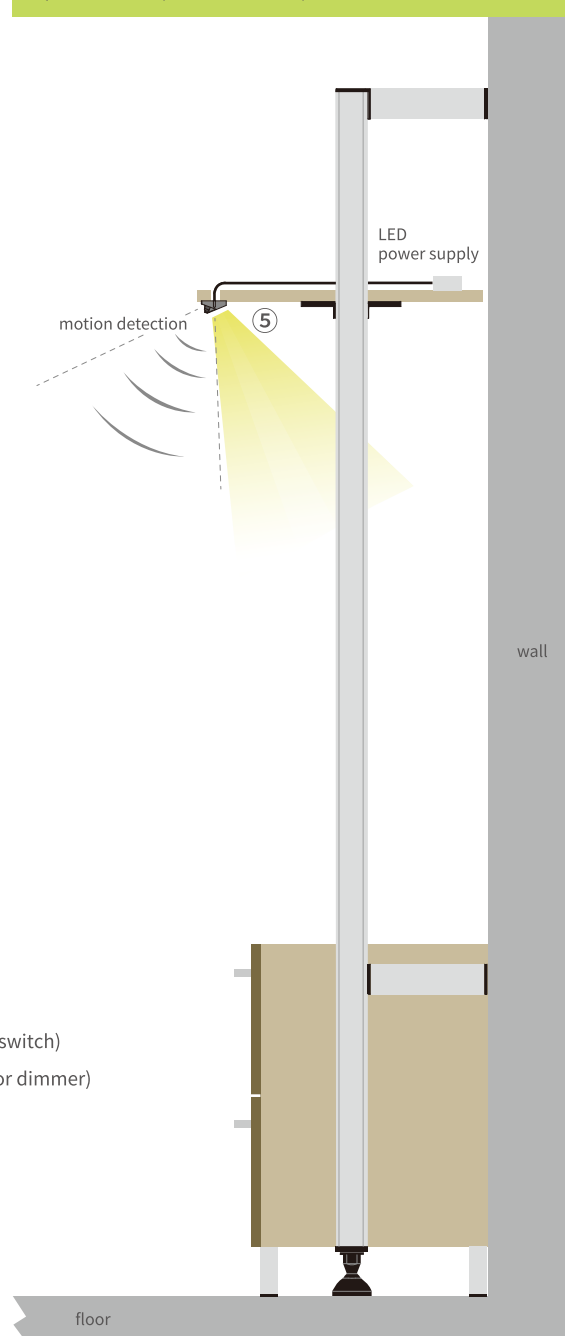

PLD System Under Cabinet LED Light

全新 PLD 系列頂級 LED 照明，適用於櫥櫃及層板

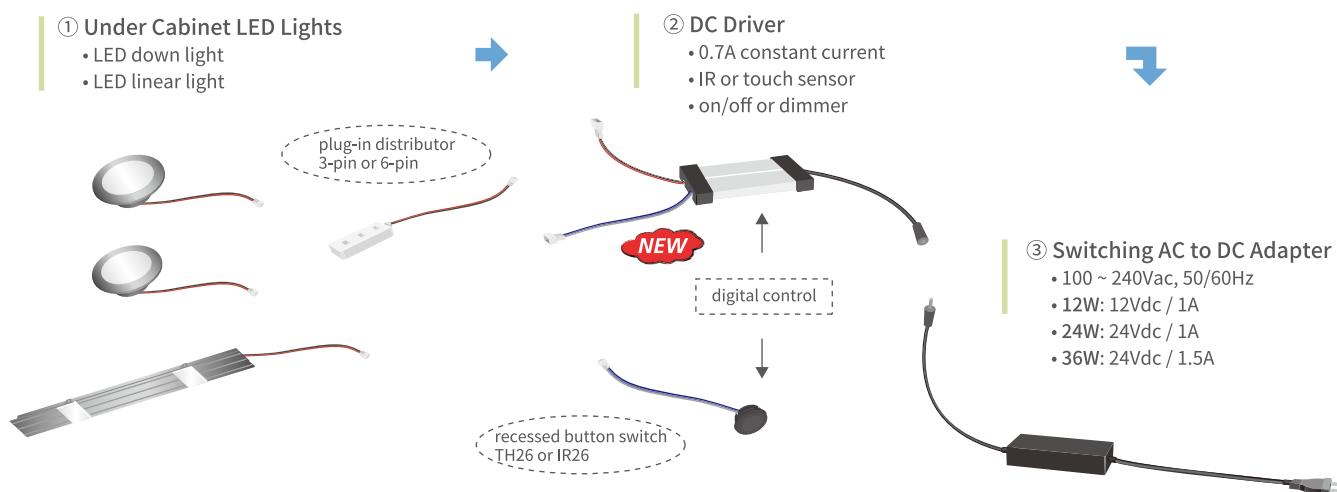


Under Cabinet LED Down Light

Under Cabinet LED Linear Light







PLD Power System DC constant current driver + Switching AC to DC adapter 12 Vdc & 24 Vdc, 100 ~ 240 Vac

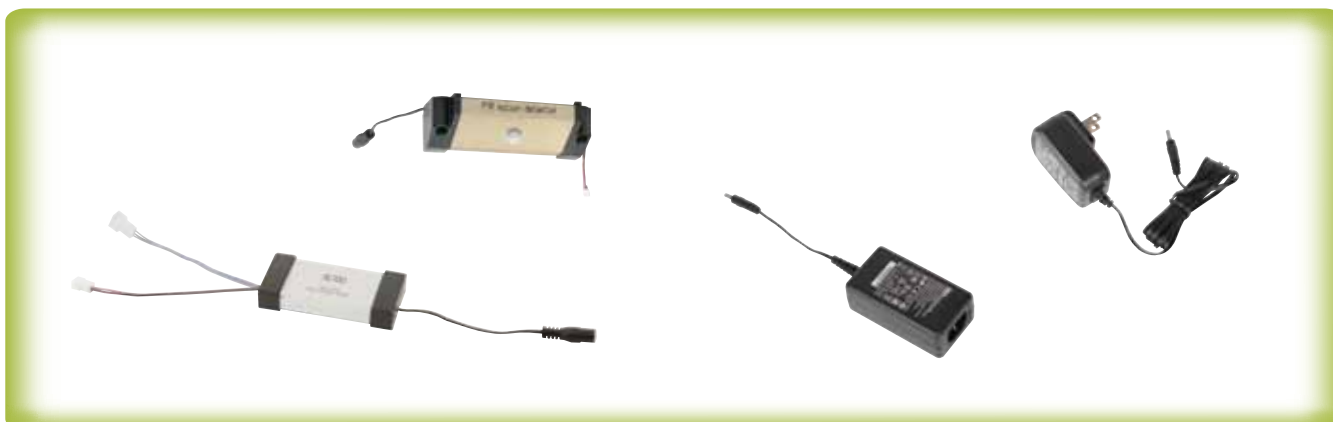



2.7W Cabinet LED Down Light
PLD20, PLD24 & PLD12

- Application: under kitchen cabinet, furniture, showcase
- Solid aluminium housing in brushed stainless (ABN)
- Drillhole: Ø48 x 13 or 14mm (drill bit #231-48), recessed mounting
- Power consumption: 3 Vdc 0.7 A

Illustration	Model							
PLD20ABN 	PLD20 2.7W Cabinet LED Down Light • Diffused <table><tr><td>PLD20ABN-CW</td><td>cool white</td></tr><tr><td>PLD20ABN-WW</td><td>warm white</td></tr><tr><td>PLD20ABN-NW</td><td>neutral white</td></tr></table>		PLD20ABN-CW	cool white	PLD20ABN-WW	warm white	PLD20ABN-NW	neutral white
PLD20ABN-CW	cool white							
PLD20ABN-WW	warm white							
PLD20ABN-NW	neutral white							
PLD24ABN 	PLD24 2.7W Cabinet LED Spotlight • 40° spot, non-swivel <table><tr><td>PLD24ABN-CW</td><td>cool white</td></tr><tr><td>PLD24ABN-WW</td><td>warm white</td></tr><tr><td>PLD24ABN-NW</td><td>neutral white</td></tr></table>		PLD24ABN-CW	cool white	PLD24ABN-WW	warm white	PLD24ABN-NW	neutral white
PLD24ABN-CW	cool white							
PLD24ABN-WW	warm white							
PLD24ABN-NW	neutral white							
PLD12ABN 	PLD12 2.7W Cabinet LED Swivel Spotlight • 40° spot, 32° tilt & 360° swivel <table><tr><td>PLD12ABN-CW</td><td>cool white</td></tr><tr><td>PLD12ABN-WW</td><td>warm white</td></tr><tr><td>PLD12ABN-NW</td><td>neutral white</td></tr></table>		PLD12ABN-CW	cool white	PLD12ABN-WW	warm white	PLD12ABN-NW	neutral white
PLD12ABN-CW	cool white							
PLD12ABN-WW	warm white							
PLD12ABN-NW	neutral white							
	• Flat surface mount housing, screw fixing <table><tr><td>T1220SK-ABN</td><td>aluminium, ABN</td></tr></table>		T1220SK-ABN	aluminium, ABN				
T1220SK-ABN	aluminium, ABN							
	• Slope surface mount housing, screw fixing <table><tr><td>T1220SKSL-ABN</td><td>aluminium, ABN</td></tr></table>		T1220SKSL-ABN	aluminium, ABN				
T1220SKSL-ABN	aluminium, ABN							





T1220SK

NEW



2.7W Cabinet LED Down Light
PLD22

- Application: under kitchen cabinet, furniture, showcase
- For 5/8" (16mm) board
- Drillhole: Ø48 x 13mm (drill bit #231-48), recessed mounting
- Power consumption: 3 Vdc 0.7 A


Illustration	Model	
PLD22ABN	• Brushed stainless surface (ABN)	
	PLD22ABN-CW	cool white
	PLD22ABN-WW	warm white
	PLD22ABN-NW	neutral white
PLD22WT	• White surface (WT)	
	PLD22WT-CW	cool white
	PLD22WT-WW	warm white
	PLD22WT-NW	neutral white
PLD22NK	• Black surface (NK)	
	PLD22NK-CW	cool white
	PLD22NK-WW	warm white
	PLD22NK-NW	neutral white
• Flat surface mount housing, screw fixing		
	T1220SK-ABN	brushed stainless (ABN)
	T1220SK-WT	white (WT)
	T1220SK-NK	black (NK)
		



2.7W Cabinet LED Down Light
PLD100 & PLD108

- Application: kitchen cabinet, furniture, bookcase, closet & display
- Solid aluminium housing in brushed stainless (ABN)
- Drillhole: Ø54 x 15mm (drill bit #231-54), recessed mounting
- Power consumption: 3 Vdc 0.7 A

Illustration	Model	
PLD100ABN	PLD100 2.7W Cabinet LED Down Light • Diffused	
	PLD100ABN-CW	cool white
	PLD100ABN-WW	warm white
	PLD100ABN-NW	neutral white
PLD108ABN	PLD108 2.7W Cabinet LED Down Light • Diffused, with tempered glass	
	PLD108ABN-CW	cool white
	PLD108ABN-WW	warm white
	PLD108ABN-NW	neutral white
	• Flat surface mount housing, screw fixing	
	T100SK-ABN	aluminium, ABN
	• Slope surface mount housing, screw fixing	
	T100SKSL-ABN	aluminium, ABN
	• Slope surface mount housing, screw fixing	
	T100TRH	stainless steel



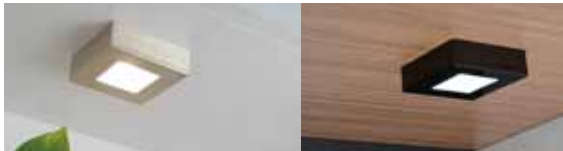



T160SK

2.7W Cabinet LED Down Light - Square Face
PLD160

- Application: kitchen cabinet, furniture, bookcase, closet & display
- Solid aluminium housing, square face 64 x 64mm
- Drillhole: Ø54 x 15mm (drill bit #231-54), recessed mounting
- Power consumption: 3 Vdc 0.7 A




Illustration	Model						
PLD160ABN	• Brushed stainless surface (ABN) <table><tr><td>PLD160ABN-CW</td><td>cool white</td></tr><tr><td>PLD160ABN-WW</td><td>warm white</td></tr><tr><td>PLD160ABN-NW</td><td>neutral white</td></tr></table>	PLD160ABN-CW	cool white	PLD160ABN-WW	warm white	PLD160ABN-NW	neutral white
PLD160ABN-CW	cool white						
PLD160ABN-WW	warm white						
PLD160ABN-NW	neutral white						
PLD160WT  	• White surface (WT) <table><tr><td>PLD160WT-CW</td><td>cool white</td></tr><tr><td>PLD160WT-WW</td><td>warm white</td></tr><tr><td>PLD160WT-NW</td><td>neutral white</td></tr></table>	PLD160WT-CW	cool white	PLD160WT-WW	warm white	PLD160WT-NW	neutral white
PLD160WT-CW	cool white						
PLD160WT-WW	warm white						
PLD160WT-NW	neutral white						
PLD160NK 	• Black surface (NK) <table><tr><td>PLD160ABN-CW</td><td>cool white</td></tr><tr><td>PLD160ABN-WW</td><td>warm white</td></tr><tr><td>PLD160ABN-NW</td><td>neutral white</td></tr></table>	PLD160ABN-CW	cool white	PLD160ABN-WW	warm white	PLD160ABN-NW	neutral white
PLD160ABN-CW	cool white						
PLD160ABN-WW	warm white						
PLD160ABN-NW	neutral white						
 T160SK-ABN T160SK-WT T160SK-NK	• Flat surface mount housing, screw fixing <table><tr><td>T160SK-ABN</td><td>brushed stinless (ABN)</td></tr><tr><td>T160SK-WT</td><td>white (WT)</td></tr><tr><td>T160SK-NK</td><td>black (NK)</td></tr></table>	T160SK-ABN	brushed stinless (ABN)	T160SK-WT	white (WT)	T160SK-NK	black (NK)
T160SK-ABN	brushed stinless (ABN)						
T160SK-WT	white (WT)						
T160SK-NK	black (NK)						

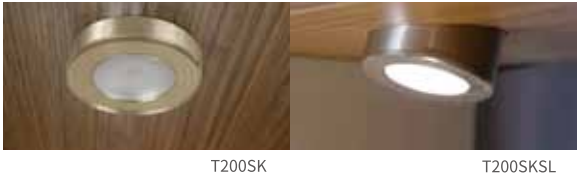

5.5W Cabinet LED Down Light
PLD200 & PLD208

- Application: kitchen cabinet, furniture, bookcase, closet & display
- Solid aluminium housing in brushed stainless (ABN)
- Drillhole: Ø68 x 15mm, recessed mounting
- Power consumption: 6 Vdc 0.7 A



Illustration	Model	
PLD200ABN	PLD200 5.5W Cabinet LED Down Light	
	• Diffused	
	PLD200ABN-CW	cool white
	PLD200ABN-WW	warm white
	PLD200ABN-NW	neutral white
PLD208ABN	PLD208 5.5W Cabinet LED Down Light	
	• Diffused, with tempered glass	
	PLD208ABN-CW	cool white
	PLD208ABN-WW	warm white
	PLD208ABN-NW	neutral white
	• Flat surface mount housing, screw fixing	
	T200SK-ABN	aluminium, ABN
	• Slope surface mount housing, screw fixing	
	T200SKSL-ABN	aluminium, ABN







T260SK

5.5W Cabinet LED Down Light
PLD260


- Application: kitchen cabinet, furniture, bookcase, closet & display
- Solid aluminium housing, square face 76 x 76mm
- Drillhole: Ø68 x 15mm, recessed mounting
- Power consumption: 6 Vdc 0.7 A



Illustration	Model	
PLD260ABN	• Brushed stainless (ABN)	
	PLD260ABN-CW	cool white
	PLD260ABN-WW	warm white
	PLD260ABN-NW	neutral white
	• White (WT)	
PLD260WT	PLD260WT-CW	cool white
 	PLD260WT-WW	warm white
	PLD260WT-NW	neutral white
	• Black (NK)	
PLD260NK	PLD260NK-CW	cool white
	PLD260NK-WW	warm white
	PLD260NK-NW	neutral white
	• Flat surface mount housing, screw fixing	
   	T260SK-ABN	brushed stainless
	T260SK-WT	white
	T260SK-NK	black

Recessed Cabinet LED Linear Light
PLD2711 series

- Application: under cabinet / shelf, for kitchen, bathroom, home and office
- Aluminium housing, brushed stainless (ABN)
- Recessed mounting
- Power supply not included

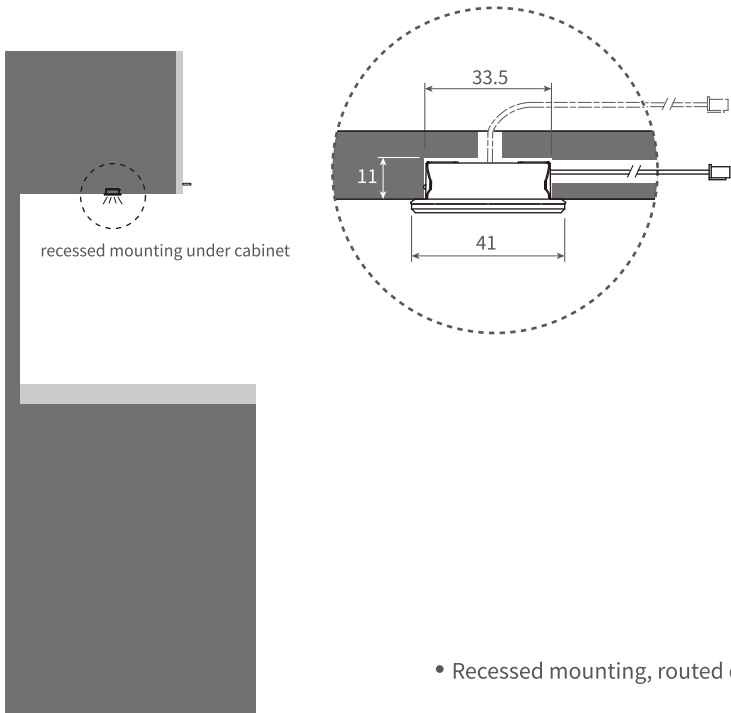

- Recessed mounting, routed dimension: (L) x (W) 33.5 x (D) 11 mm






Illustration	Model						
PLD2711-60ABN  	PLD2711-60 • 563mm L. , 5.5W / 2 x 3 Vdc 700mA • Routed size: (L) 540 x (W) 33.5 x (D) 11mm <table><tr><td>PLD2711-60ABN-CW</td><td>cool white</td></tr><tr><td>PLD2711-60ABN-WW</td><td>warm white</td></tr><tr><td>PLD2711-60ABN-NW</td><td>neutral white</td></tr></table>	PLD2711-60ABN-CW	cool white	PLD2711-60ABN-WW	warm white	PLD2711-60ABN-NW	neutral white
PLD2711-60ABN-CW	cool white						
PLD2711-60ABN-WW	warm white						
PLD2711-60ABN-NW	neutral white						
PLD2711-90ABN  	PLD2711-90 • 863mm L. , 8.1W / 3 x 3 Vdc 700mA • Routed size: (L) 840 x (W) x 33.5 x (D) 11mm <table><tr><td>PLD2711-90ABN-CW</td><td>cool white</td></tr><tr><td>PLD2711-90ABN-WW</td><td>warm white</td></tr><tr><td>PLD2711-90ABN-NW</td><td>neutral white</td></tr></table>	PLD2711-90ABN-CW	cool white	PLD2711-90ABN-WW	warm white	PLD2711-90ABN-NW	neutral white
PLD2711-90ABN-CW	cool white						
PLD2711-90ABN-WW	warm white						
PLD2711-90ABN-NW	neutral white						


Surface Cabinet LED Linear Light
PLD2721 series

- Application: under cabinet / shelf, for kitchen, bathroom, home and office
- Aluminium housing, brushed stainless (ABN)
- Flat surface mounting screw fixing with cover cap
- Power supply not included

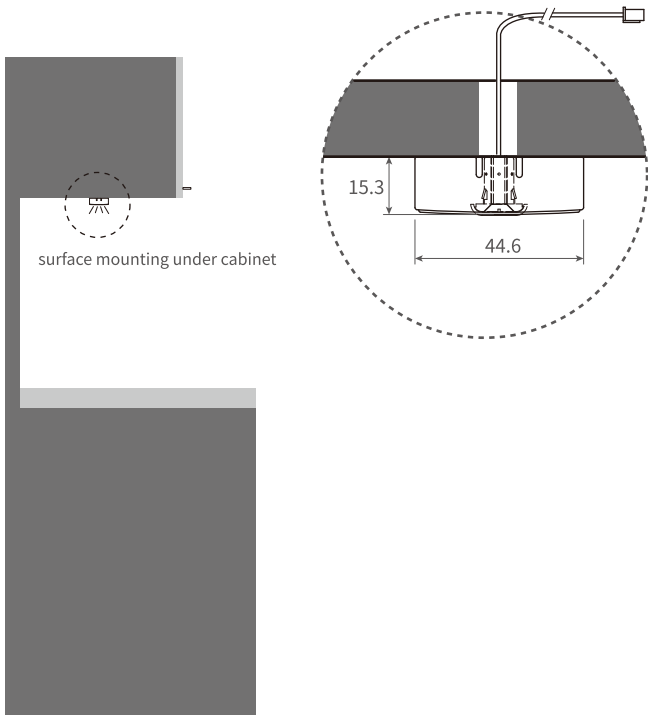

Illustration

PLD2721-60ABN



Model


PLD2721-60
• 598mm L. , 5.5W / 2 x 3 Vdc 700mA

PLD2721-60ABN-CW cool white

PLD2721-60ABN-WW warm white

PLD2721-60ABN-NW neutral white

PLD2721-90ABN



PLD2721-90
• 898mm L. , 8.1W / 3 x 3 Vdc 700mA

PLD2721-90ABN-CW cool white


PLD2721-90ABN-WW warm white

PLD2721-90ABN-NW neutral white

Corner Surface Cabinet LED Linear Light
PLD2731 series

NEW

- Application: under cabinet / shelf, for kitchen, bathroom, home and office
- Aluminium housing, brushed stainless (ABN)
- Corner surface mounting, screw fixing
- Power supply not included

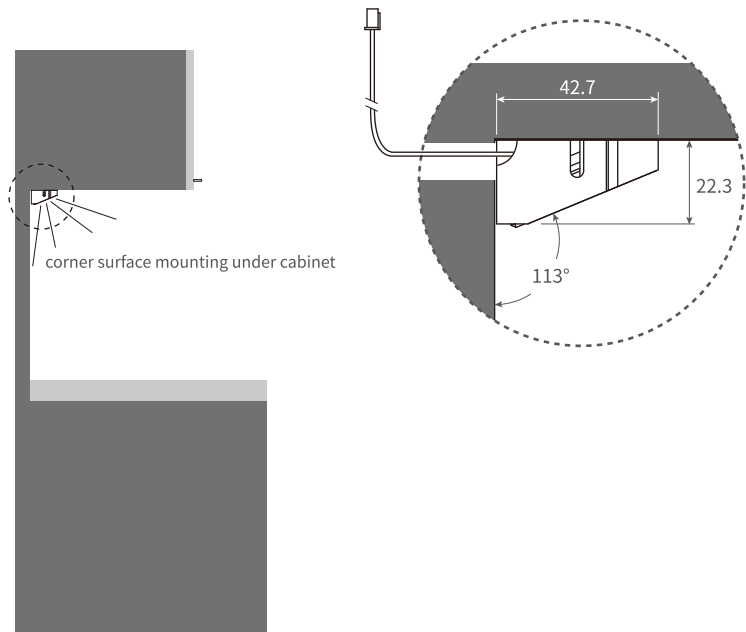

Illustration

Model

PLD2731-60ABN

PLD2731-60
• 596mm L. , 5.5W / 2 x 3 Vdc 700mA



PLD2731-60ABN-CW cool white

PLD2731-60ABN-WW warm white

PLD2731-60ABN-NW neutral white



PLD2731-90ABN

PLD2731-90
• 896mm L. , 8.1W / 3 x 3 Vdc 700mA



PLD2731-90ABN-CW cool white


PLD2731-90ABN-WW warm white

PLD2731-90ABN-NW neutral white



Internal Cabinet LED Linear Light
PLD2703 series


- To be mounted under wooden shelf, ideal for open wardrobe APS51 system
- Aluminium housing, matt silver (NA)
- Top surface mounting, screw fixing

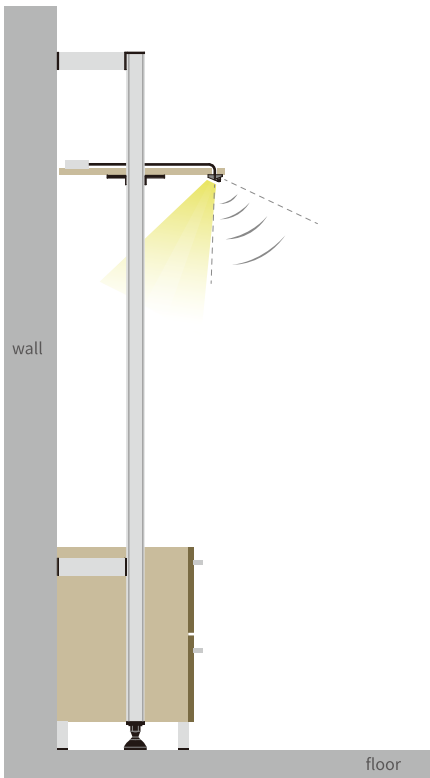

Illustration

Model

PLD2703-53NA with 2 nylon brackets




PLD2703-53
• 506.8mm L. , 5.5W / 2 x 3 Vdc 700mA

PLD2703-53NA-CW cool white

PLD2703-53NA-WW warm white

PLD2703-53NA-NW neutral white

PLD2703-83NA with 2 nylon brackets




PLD2703-83
• 806.8mm L. , 8.1W / 3 x 3 Vdc 700mA

PLD2703-83NA-CW cool white

PLD2703-83NA-WW warm white

PLD2703-83NA-NW neutral white

CS700PIR Fit for 1~3 pcs PLD2703-53 or 1~2 pcs PLD2703-83




CS700PIR DC LED Driver with PIR motion detector

- Corner surface mounting
- 60 seconds auto-off, 3.5 ~ 4 meter detecting range
- Input: 12 Vdc / 24 Vdc
- Output: 0.7A constant current
- Maximum consumption 18 Vdc 0.7A


 Xplendid®

Installation of multiple PLD under cabinet LED lights and power supply
示意裝置多燈式 PLD 系列 LED 燈及電源器

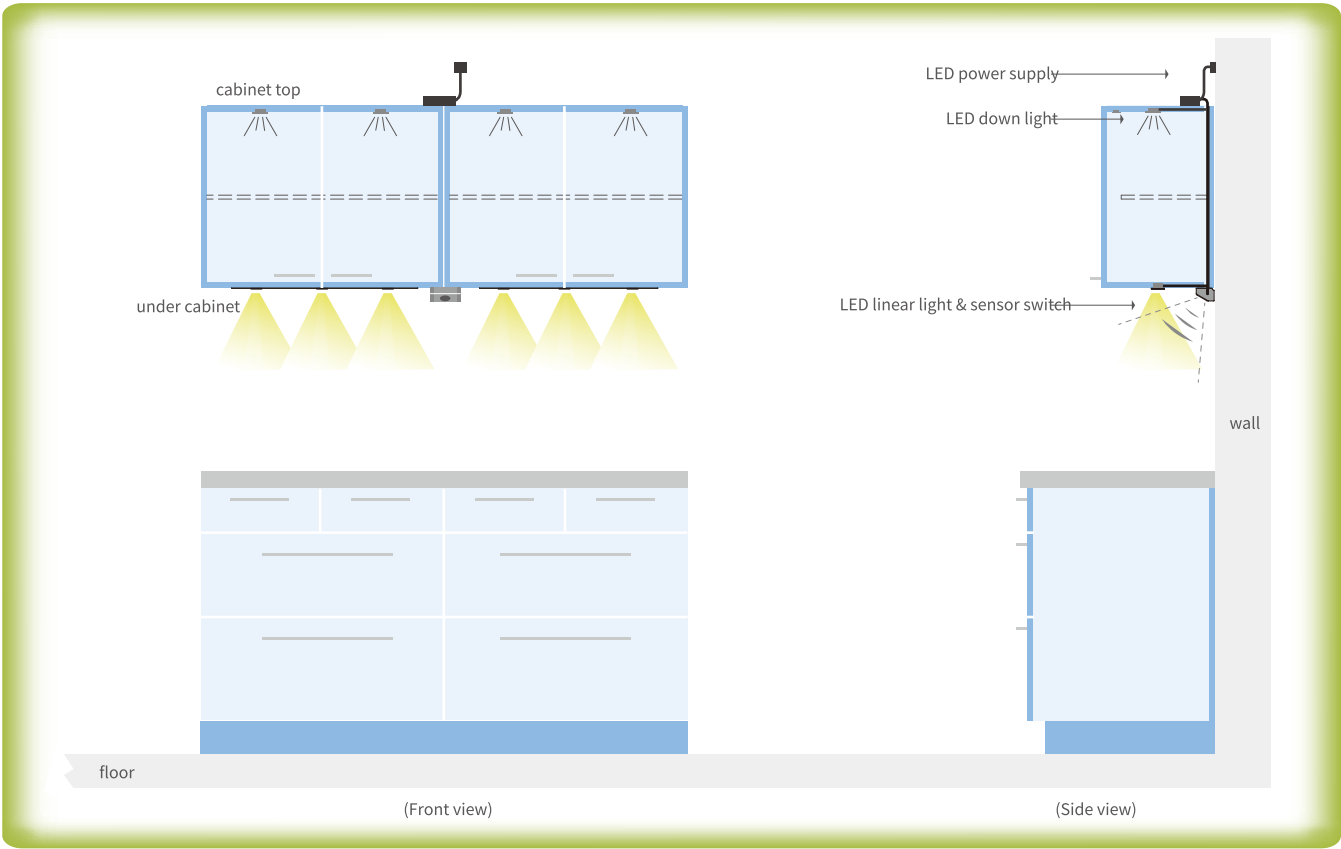

Mounted Under Cabinet

Sited on Cabinet Top

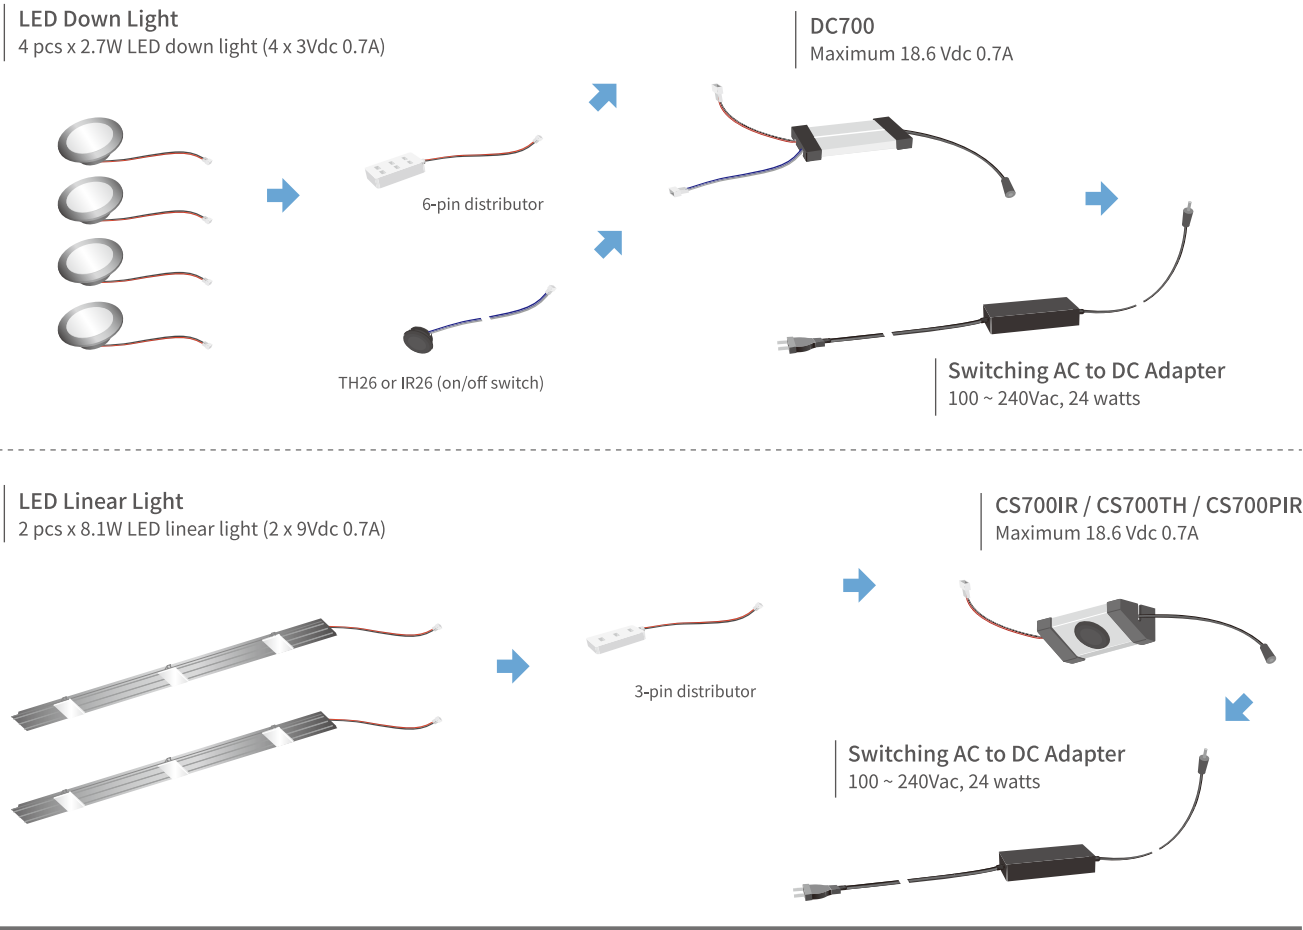

For long connection, use DC extension wire.
For multiple connection, use 3-pin or 6-pin distributor.

LED Down Lights



+




3-pin distributor



To DC constant current driver

DC Extension Wires

- With foolproof connectors at both ends (female & male)
- Extending connection of LED light and power supply

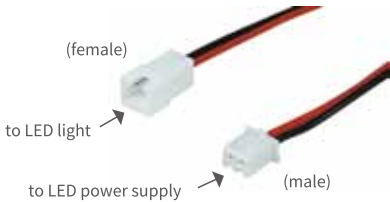

Illustration

Model



EW-100 100 cm long

EW-200 200 cm long

3-Pin & 6-Pin Distributor

- For constant current LED driver, circuit in series
- Junction box with 12cm L. black / red wire and connector, loop connectors included

DS3



3-Pin Distributor

- With 2 loop connectors

DS3 3-pin distributor, for 2 ~ 3 LED lights

DS6



6-Pin Distributor


- With 5 loop connectors

DS6 6-pin distributor, for 2 ~ 6 LED lights




Linking cabinet LED lights to DC driver DC700

LED Down Lights



+




(3-pin or 6-pin distributor)

LED Linear Light



DC700 DC Driver

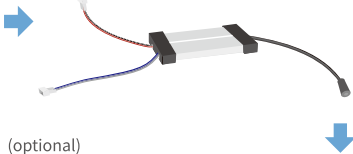


(optional)

TH26 or IR26




AC to DC Adapter

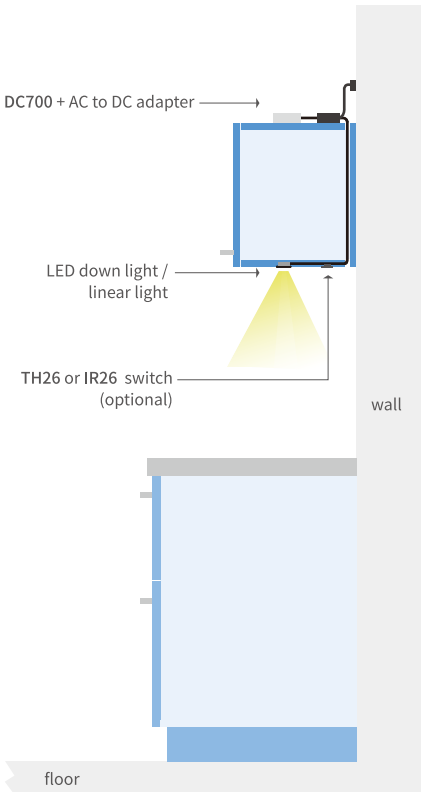

Illustration

Model

DC700



DC700 DC Driver


- Dimension: (L) 92 x (W) 44.6 x (H) 15.3mm
- 12 / 24Vdc, 0.7A constant current
- Maximum consumption 18Vdc 0.7A
- Available for linking TH26 & IR26 recessed button



TH26



IR26



Recessed Button Switch


- Ø32mm, for Ø26mm drillhole

TH26 on/off touch switch, light gray

IR26 on/off IR sensor switch, black




Linking cabinet LED lights to DC driver CS700 (corner surface mounting with various sensor switches)

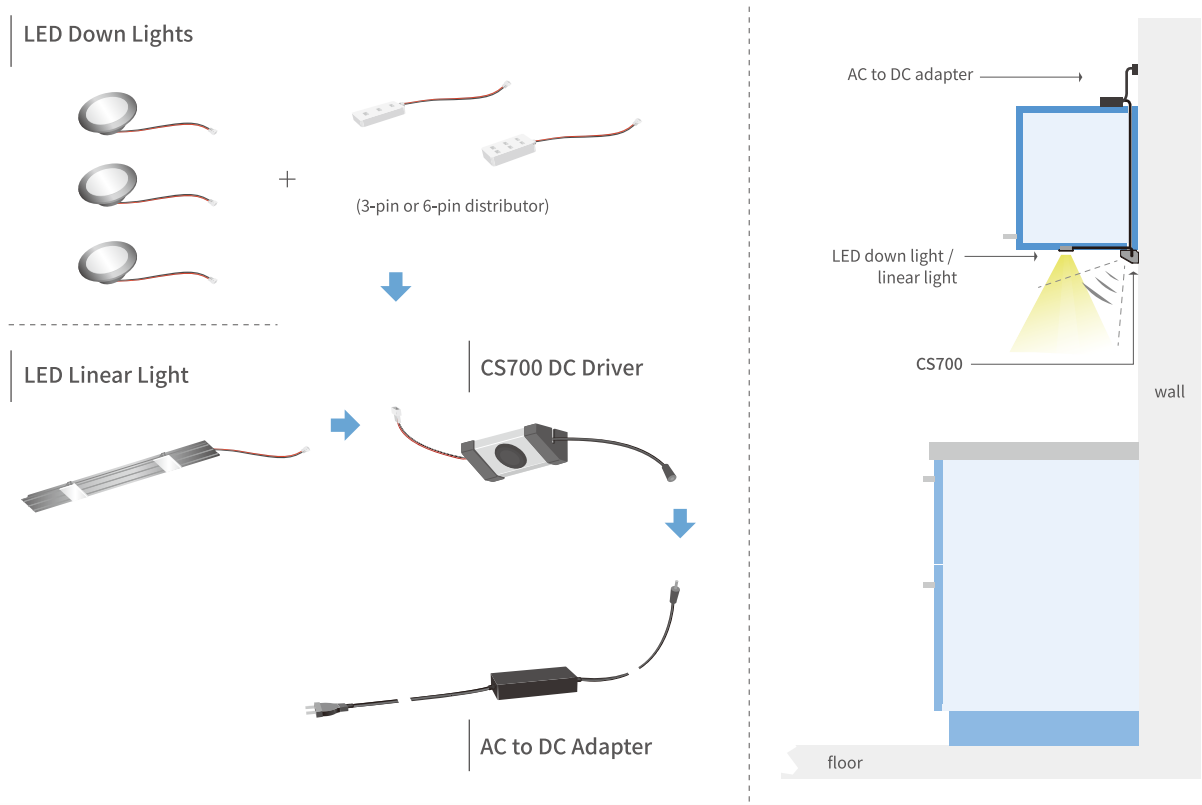

Illustration


Model




- CS700 DC Driver, with sensor switch
- Corner surface mounting, (L) 112 x (W) 44 x (H) 31.4mm
 - Input: 12 Vdc / 24 Vdc
 - Output: 0.7A constant current
 - Maximum consumption 18 Vdc 0.7A

CS700TH	touch on/off
CS700THD	touch dimmer
CS700IR	hand-waving on/off sensor
CS700IRD	hand-waving dimmer sensor

CS700PIR (motion detector)





- CS700PIR DC Driver, PIR motion detector
- Corner surface mounting, (L) 112 x (W) 44 x (H) 31.4mm
 - 60 seconds auto-off, 3.5 ~ 4 meter detecting range
 - Input: 12 Vdc / 24 Vdc
 - Output: 0.7A constant current
 - Maximum consumption 18 Vdc 0.7A

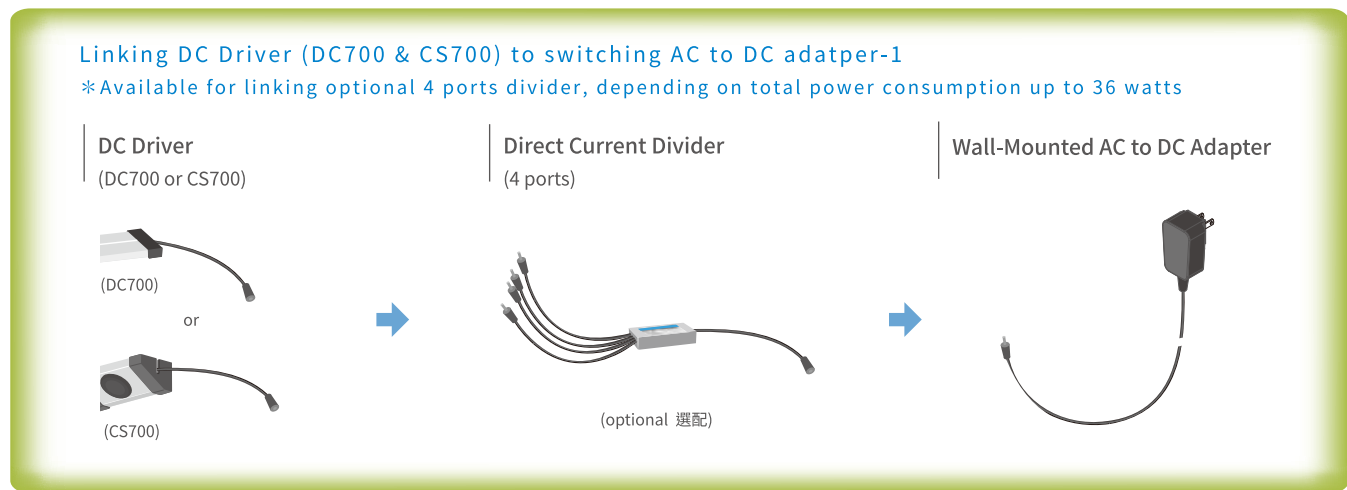


Wall-Mounted AC to DC Adapter, 12 / 24 watts

- Input: 100 ~ 240 Vac, 50/60Hz
- Worldwide safety certificated

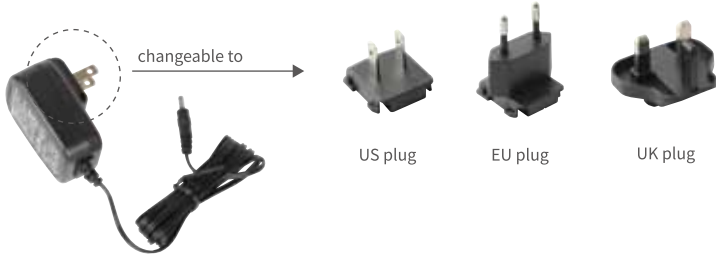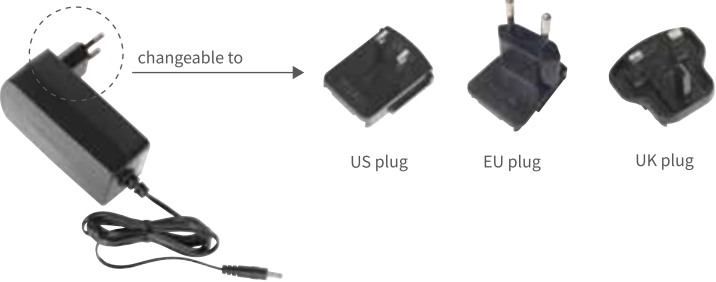

Illustration	Model						
 WM12W-US	WM12W Wall-Mounted AC to DC Adapter • Output: 12 Vdc 1A • Maximum power: 12 watts • Class 2 certified • Various types of wall-mounted plug interchangeable <table><tr><td>WM12W-US</td><td>U.S.A. / Canada plug</td></tr><tr><td>WM12W-EU</td><td>Euro plug</td></tr><tr><td>WM12W-UK</td><td>British plug</td></tr></table>	WM12W-US	U.S.A. / Canada plug	WM12W-EU	Euro plug	WM12W-UK	British plug
WM12W-US	U.S.A. / Canada plug						
WM12W-EU	Euro plug						
WM12W-UK	British plug						
 WM24W-EU	WM24W Wall-Mounted AC to DC Adapter • Output: 24 Vdc 1A • Maximum power: 24 watts • Class 2 certified • Various types of wall-mounted plug interchangeable <table><tr><td>WM24W-US</td><td>U.S.A. / Canada plug</td></tr><tr><td>WM24W-EU</td><td>Euro plug</td></tr><tr><td>WM24W-UK</td><td>British plug</td></tr></table>	WM24W-US	U.S.A. / Canada plug	WM24W-EU	Euro plug	WM24W-UK	British plug
WM24W-US	U.S.A. / Canada plug						
WM24W-EU	Euro plug						
WM24W-UK	British plug						
DD24304 	DD24304 4 Ports Direct Current Divider • Linking up 2 ~ 4 pcs DC drivers						

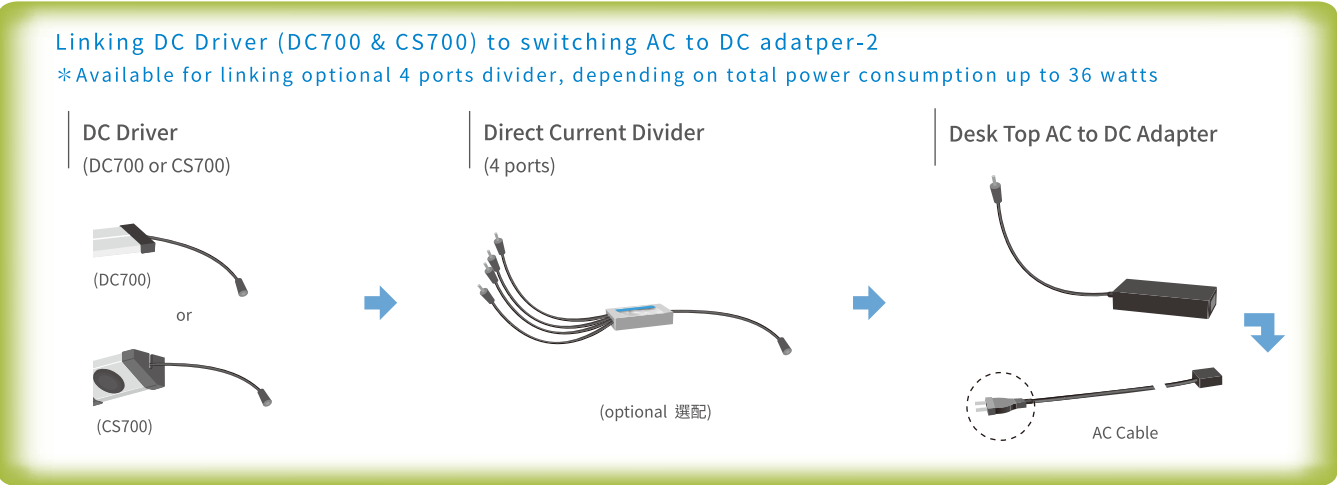

Desk Top AC to DC Adapter, 12 / 24 watts

- Input: 100 ~ 240 Vac, 50/60Hz
- Worldwide safety certificated




Illustration	Model						
DT24W 	DT24W Desk Top AC to DC Adapter • Output: 24 Vdc 1A • Maximum power: 24 watts • Class 2 certified • Not including AC cable and plug						
DT36W 	DT36W Desk Top AC to DC Adapter • Output: 24 Vdc 1.5A • Maximum power: 36 watts • Class 2 certified • Not including AC cable and plug						
 DT180-US  DT180-EU  DT180-UK	AC Cable & Plug for DT24W & DT36W • Cable length: 180cm <table><tr><td>DT180-US</td><td>U.S.A. / Canada plug</td></tr><tr><td>DT180-EU</td><td>Euro plug</td></tr><tr><td>DT180-UK</td><td>British plug</td></tr></table>	DT180-US	U.S.A. / Canada plug	DT180-EU	Euro plug	DT180-UK	British plug
DT180-US	U.S.A. / Canada plug						
DT180-EU	Euro plug						
DT180-UK	British plug						
DT50 	DT50 AC Cable • 50cm long cable for DT24W & DT36W • Without mains plug						
E1AJ100 	E1AJ100 Extension E1AJ Wire • 1 meter (1,000mm) long • Linking up DC driver and AC to DC adapter						



XP System Under Cabinet LED Linear Light & Bedside Reading Light 全新 XP 系列頂級 LED 照明，適用於櫥櫃及床頭


① LED Lights

- LED linear light
- LED bedside light

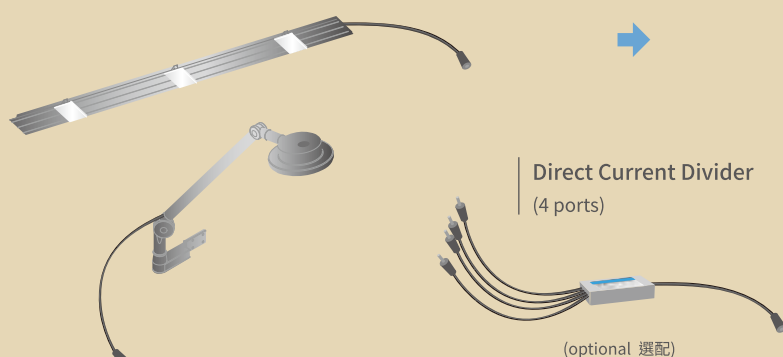

② Switching AC to DC Adapter

- DT24W Desk top
- WM12W Wall-mounted

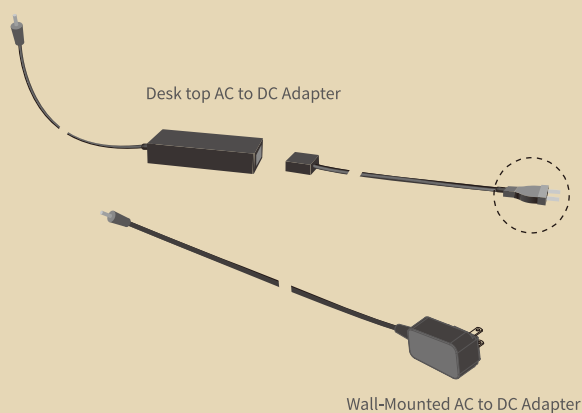

Under Cabinet LED Linear Light



Bedside LED Reading Light





XP LED power system Switching AC to DC adapter 100 ~ 240Vac, 12 Vdc / 24 Vdc




Recessed Cabinet LED Linear Light

XP2711 & XP2711IR series

- Application: under cabinet / shelf for kitchen, bathroom, home and office
- Aluminium housing in white (WT), inset with digital control
- Recessed mounting
- Not including switching AC to DC adapter

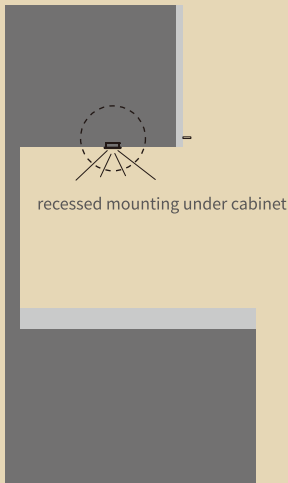

• Routed dimension: (L) x (W) 33.5 x (D) 11 mm



- IR: Hand-waving on/off
IRD: Hand-waving dimming, 100% to 8% & on/off
- Hand waving within 5cm distance



Illustration

Model


XP2711-60WT



- XP2711-60
- 563mm L. , 5.5W / 2 x 3 Vdc 700mA
 - Routed size: (L) 540 x (W) 33.5mm

XP2711-60WT-CW	cool white
XP2711-60WT-WW	warm white
XP2711-60WT-NW	neutral white

XP2711-90WT



- XP2711-90
- 863mm L. , 8.1W / 3 x 3 Vdc 700mA
 - Routed size: (L) 840 x (W) 33.5mm

XP2711-90WT-CW	cool white
XP2711-90WT-WW	warm white
XP2711-90WT-NW	neutral white



XP2711IR-60WT



- XP2711IR-60
- 563mm L. , 5.5W / 2 x 3 Vdc 700mA
 - Routed size: (L) 540 x (W) 33.5mm, with IR sensor

XP2711IR-60WT-CW	cool white
XP2711IR-60WT-WW	warm white
XP2711IR-60WT-NW	neutral white

XP2711IR-90WT


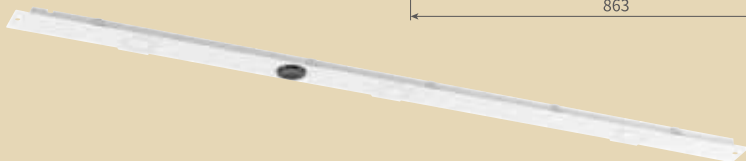


- XP2711IR-90
- 863mm L. , 8.1W / 3 x 3 Vdc 700mA
 - Routed size: (L) 840 x (W) 33.5mm, with IR sensor

XP2711IR-90WT-CW	cool white
XP2711IR-90WT-WW	warm white
XP2711IR-90WT-NW	neutral white

Surface Under Cabinet LED Linear Light
SCL2711IR series

- Application: under cabinet / shelf for kitchen, bathroom, home and office
- With on/off sensor switch
- Surface mounting, screw fixing
- Not including switching AC to DC adapter

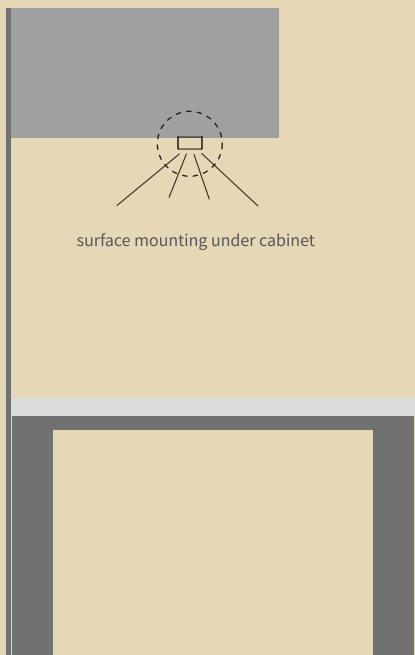

- IR: Hand-waving on/off
- IRD: Hand-waving dimming, 100% to 8% & on/off
- Hand waving within 5cm distance

Illustration


SCL2711IR-60WT



Model

SCL2711IR-60	
• 606mm L. , 5.5W / 2 x 3 Vdc 700mA	
• White (WT)	
SCL2711IR-60WT-CW	cool white
SCL2711IR-60WT-WW	warm white
SCL2711IR-60WT-NW	neutral white



SCL2711IR-90WT



SCL2711IR-90	
• 906mm L. , 8.1W / 3 x 3 Vdc 700mA	
• White (WT)	
SCL2711IR-90WT-CW	cool white
SCL2711IR-90WT-WW	warm white
SCL2711IR-90WT-NW	neutral white

Corner Surface Cabinet LED Linear Light
XP2731 & XP2731IR series



- Application: under cabinet / shelf for kitchen, bathroom, home and office
- Aluminium housing in white (WT), inset with digital control
- Corner surface mounting, screw fixing
- Not including switching AC to DC adapter

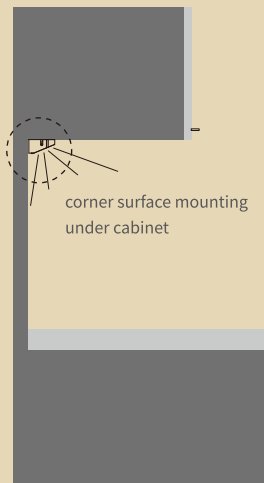

IR: Hand-waving on/off
IRD: Hand-waving dimming, 100% to 8% & on/off
• Hand waving within 5cm distance

Illustration

XP2731-60WT



Model


XP2731-60
• 596mm L. , 5.5W / 2 x 3 Vdc 700mA

XP2731-60WT-CW cool white

XP2731-60WT-WW warm white

XP2731-60WT-NW neutral white

XP2731-90WT




XP2731-90
• 896mm L. , 8.1W / 3 x 3 Vdc 700mA

XP2731-90WT-CW cool white

XP2731-90WT-WW warm white

XP2731-90WT-NW neutral white

XP2731IR-60WT





XP2731IR-60
• 596mm L. , 5.5W / 2 x 3 Vdc 700mA
• With sensor dimmer 100% to 8% & on/off

XP2731IR-60WT-CW cool white

XP2731IR-60WT-WW warm white

XP2731IR-60WT-NW neutral white

XP2731IR-90WT



XP2731IR-90
• 896mm L. , 8.1W / 3 x 3 Vdc 700mA
• With sensor dimmer 100% to 8% & on/off




XP2731IR-90WT-CW cool white

XP2731IR-90WT-WW warm white

XP2731IR-90WT-NW neutral white



Corner Surface Cabinet LED Linear Light
XP2731PIR series

- Application: under cabinet / shelf for kitchen, bathroom, home and office
- With PIR motion detector, 2.5 meters detecting range, 60 seconds auto-off
- Aluminium housing in white (WT), inset with digital control
- Corner surface mounting, screw fixing
- Not including switching AC to DC adapter

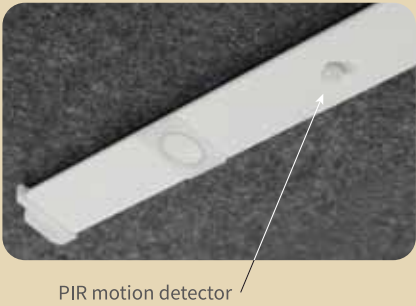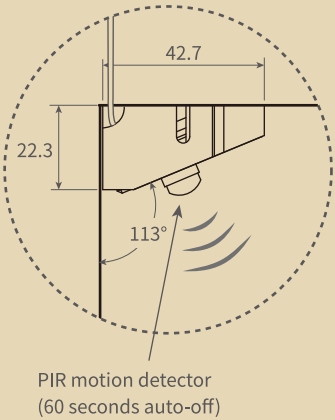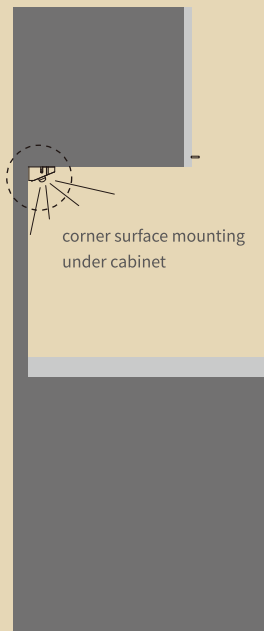

Illustration

XP2731PIR-60WT



Model


- XP2731PIR-60**
- 596mm L. , 5.5W / 2 x 3 Vdc 700mA
 - With PIR motion detector

XP2731PIR-60WT-CW cool white

XP2731PIR-60WT-WW warm white

XP2731PIR-60WT-NW neutral white

XP2731PIR-90WT



- XP2731PIR-90**
- 896mm L. , 8.1W / 3 x 3 Vdc 700mA
 - With PIR motion detector



XP2731PIR-90WT-CW cool white

XP2731PIR-90WT-WW warm white

XP2731PIR-90WT-NW neutral white

Internal Drawer LED Linear Light
XP2701PIR series



- Application: inside the drawer of kitchen cabinet and furniture
- With PIR motion detector, 60 seconds auto-off
- Aluminium housing in matt silver (NA), inset with digital control
- Top surface mounting, screw fixing
- Not including switching AC to DC adapter

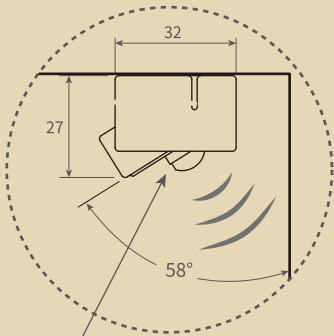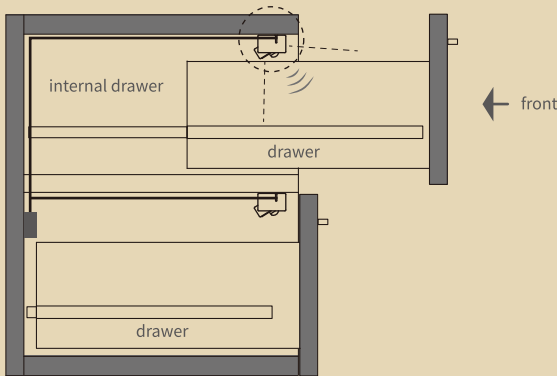

PIR motion detector
(60 seconds auto-off)

Illustration

XP2701PIR-80NA



Model

XP2701PIR-80


- 762mm L. , 8.1W / 3 x 3 Vdc 700mA
- With PIR motion detector

XP2701PIR-80NA-CW cool white

XP2701PIR-80NA-WW warm white

XP2701PIR-80NA-NW neutral white

XP2701PIR-90NA



XP2701PIR-90

- 862mm L. , 8.1W / 3 x 3 Vdc 700mA
- With PIR motion detector


XP2701PIR-90NA-CW cool white

XP2701PIR-90NA-WW warm white

XP2701PIR-90NA-NW neutral white


Internal Cabinet LED Linear Light
XP2703PIR series

- Application: internal cabinet, wardrobe or closet
- With PIR motion detector, 60 seconds auto-off
- Aluminium housing in matt silver (NA), inset with digital control
- Top surface mounting, screw fixing
- Not including switching AC to DC adapter

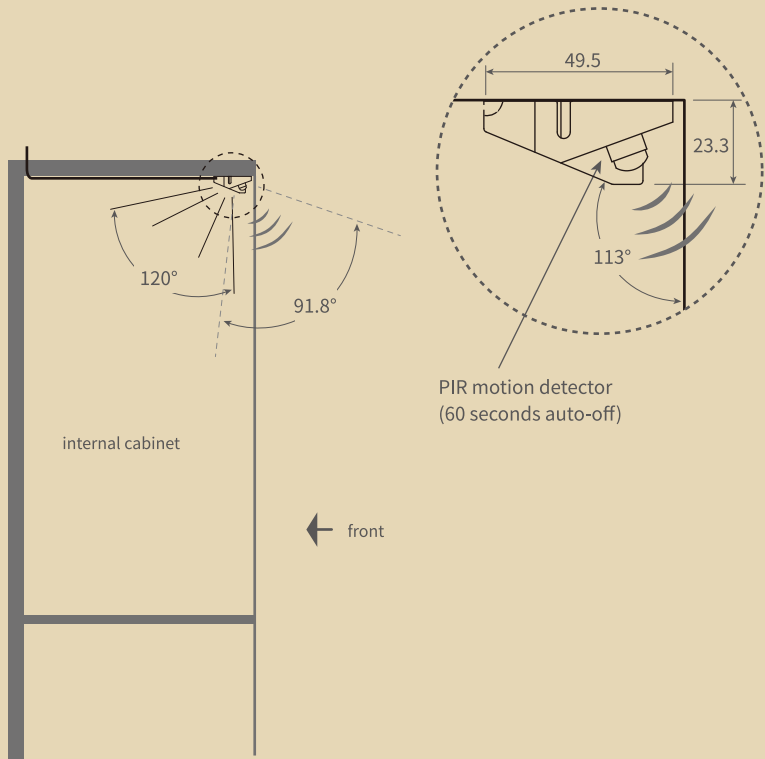

Illustration

XP2703PIR-54NA



Model

XP2703PIR-54



- 542mm L. , 5.5W / 2 x 3 Vdc 700mA
- With PIR motion detector

XP2703PIR-54NA-CW cool white

XP2703PIR-54NA-WW warm white

XP2703PIR-54NA-NW neutral white

XP2703PIR-83NA

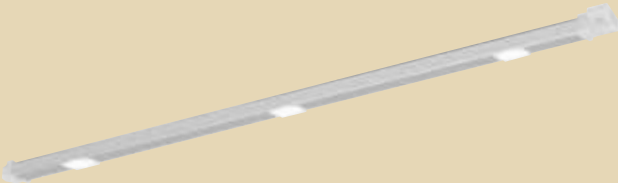

XP2703PIR-83

- 832mm L. , 8.1W / 3 x 3 Vdc 700mA
- With PIR motion detector


XP2703PIR-83NA-CW cool white

XP2703PIR-83NA-WW warm white

XP2703PIR-83NA-NW neutral white

 Xplendid®

Installation of multiple XP under cabinet LED lights and power supply
示意裝置多燈式 XP 系列 LED 燈及電源器

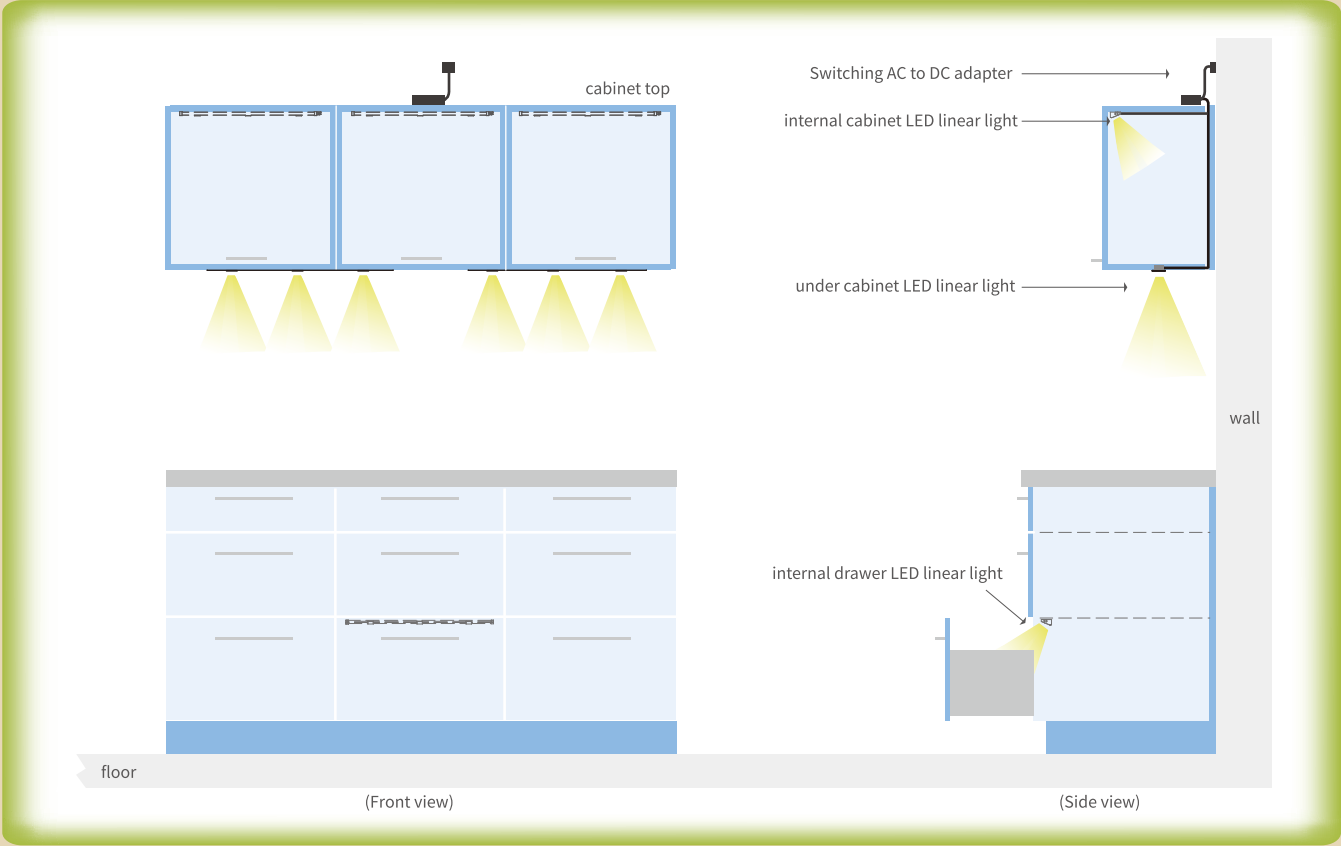


Mounted Under Cabinet / Internal Cabinet / Internal Drawer

Sited on Cabinet Top


LED Linear Light
2 pcs x 8.1W LED linear light (2 x 9Vdc 0.7A)


Switching AC to DC Adapter
DT24W & WH24W
100 ~ 240Vac, 24 watts

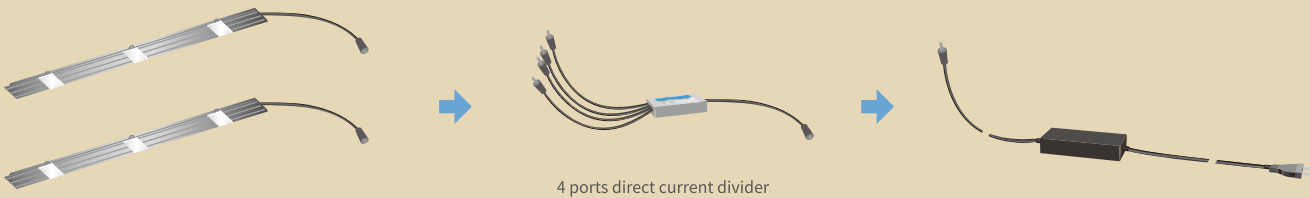

LED Linear Light
4 pcs x 8.1W LED linear light (4 x 9Vdc 0.7A)

Switching AC to DC Adapter
DT36W
100 ~ 240Vac, 36 watts

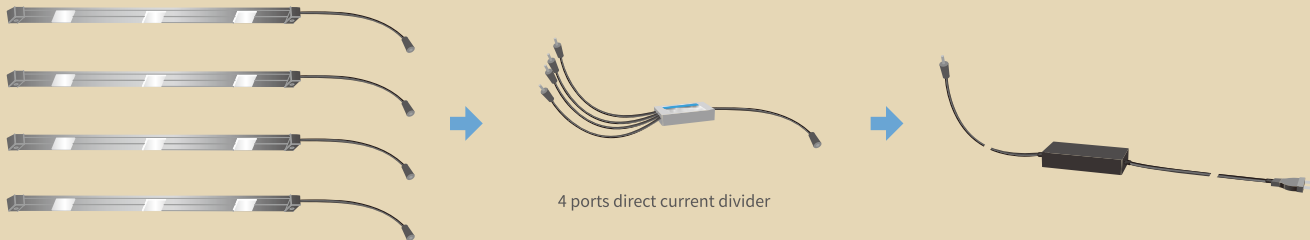

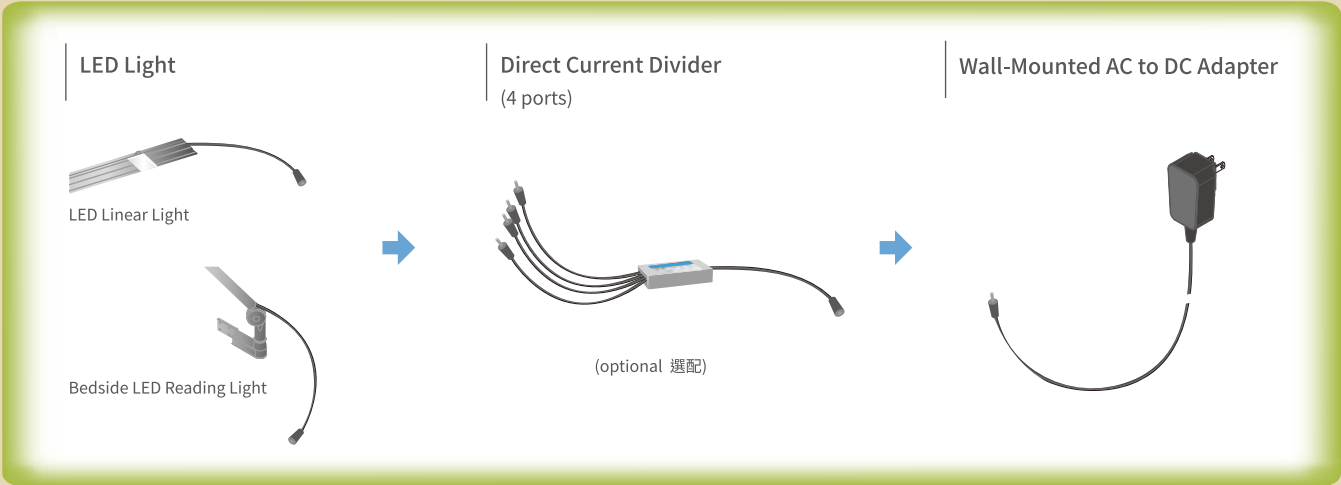


Wall-Mounted AC to DC Adapter, 12 / 24 watts

- Input: 100 ~ 240 Vac, 50/60Hz
- Worldwide safety certificated




Illustration	Model						
WM12W WM12W-US	WM12W Wall-Mounted AC to DC Adapter • Output: 12 Vdc 1A • Maximum power: 12 watts • Class 2 certified • Various types of wall-mounted plug interchangeable <table><tr><td>WM12W-US</td><td>U.S.A. / Canada plug</td></tr><tr><td>WM12W-EU</td><td>Euro plug</td></tr><tr><td>WM12W-UK</td><td>British plug</td></tr></table>	WM12W-US	U.S.A. / Canada plug	WM12W-EU	Euro plug	WM12W-UK	British plug
WM12W-US	U.S.A. / Canada plug						
WM12W-EU	Euro plug						
WM12W-UK	British plug						
WM24W WM24W-EU	WM24W Wall-Mounted AC to DC Adapter • Output: 24 Vdc 1A • Maximum power: 24 watts • Class 2 certified • Various types of wall-mounted plug interchangeable <table><tr><td>WM24W-US</td><td>U.S.A. / Canada plug</td></tr><tr><td>WM24W-EU</td><td>Euro plug</td></tr><tr><td>WM24W-UK</td><td>British plug</td></tr></table>	WM24W-US	U.S.A. / Canada plug	WM24W-EU	Euro plug	WM24W-UK	British plug
WM24W-US	U.S.A. / Canada plug						
WM24W-EU	Euro plug						
WM24W-UK	British plug						
DD24304	DD24304 4 Ports Direct Current Divider • Linking up 2 ~ 4 pcs DC drivers						

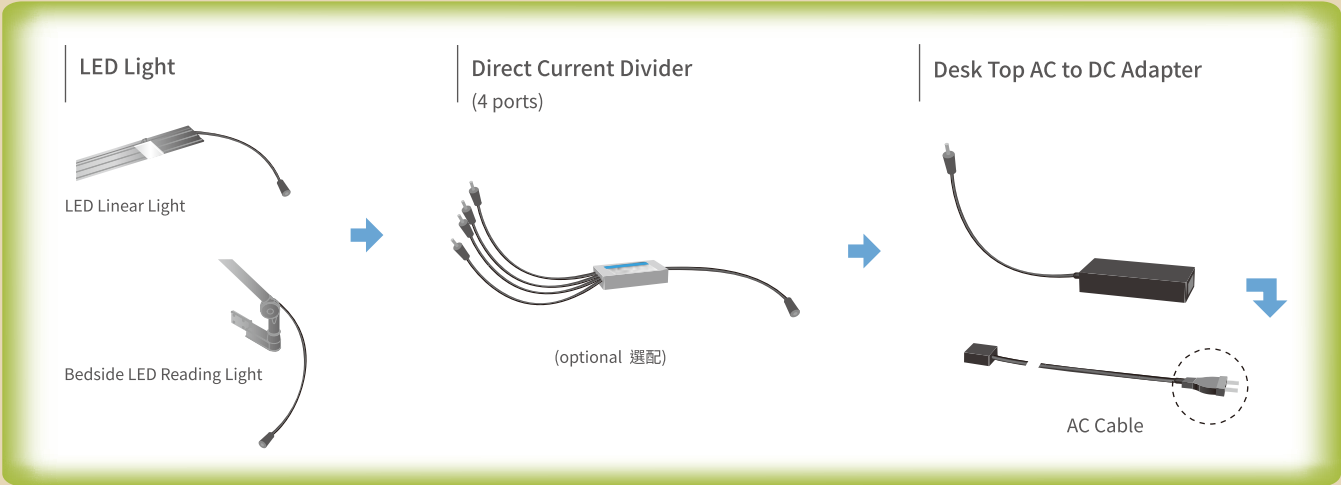

Desk Top AC to DC Adapter, 12 / 24 watts


- Input: 100 ~ 240 Vac, 50/60Hz
- Worldwide safety certificated



Illustration	Model						
	DT24W Desk Top AC to DC Adapter • Output: 24 Vdc 1A • Maximum power: 24 watts • Class 2 certified • Not including AC cable and plug						
	DT36W Desk Top AC to DC Adapter • Output: 24 Vdc 1.5A • Maximum power: 36 watts • Class 2 certified • Not including AC cable and plug						
 	AC Cable & Plug for DT24W & DT36W • Cable length: 180cm <table><tr><td>DT180-US</td><td>U.S.A. / Canada plug</td></tr><tr><td>DT180-EU</td><td>Euro plug</td></tr><tr><td>DT180-UK</td><td>British plug</td></tr></table>	DT180-US	U.S.A. / Canada plug	DT180-EU	Euro plug	DT180-UK	British plug
DT180-US	U.S.A. / Canada plug						
DT180-EU	Euro plug						
DT180-UK	British plug						
	DT50 AC Cable • 50cm long cable for DT24W & DT36W • Without mains plug						
	E1AJ100 Extension E1AJ Wire • 1 meter (1,000mm) long • Linking up DC driver and AC to DC adapter						

Ztra Bedside 6W LED Reading Light
ZT2021 series

- 6 watts LED reading light with single light arm
- Light head with touch dimmer switch
- With left (BM9-L) or right (BM9-R) bedside mounting bracket or wall-mounted bracket (WM8)
- Including WM12W wall-mounted AC to DC adapter

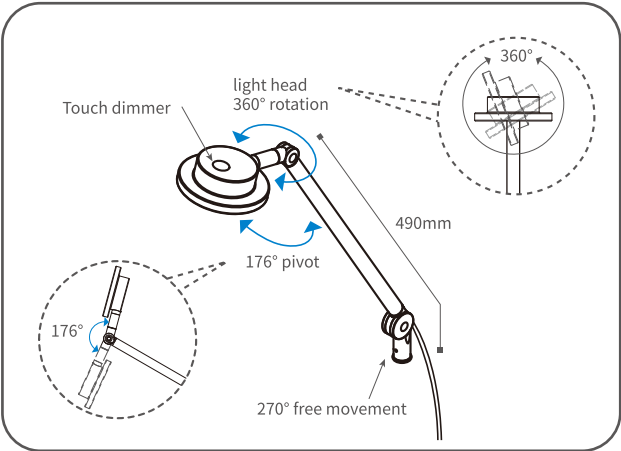

Illustration

ZT2021-BM9L *Left bedside*



Model

- ZT2021-BM9L
- Left bedside, with touch dimmer
 - Neutral white (NW)

ZT2021-BM9L-WT-NW white

ZT2021-BM9L-NK-NW black

ZT2021-BM9R *Right bedside*



- ZT2021-BM9R
- Right bedside, with touch dimmer
 - Neutral white (NW)

ZT2021-BM9R-WT-NW white

ZT2021-BM9R-NK-NW black

ZT2021-WM8 *Wall-mounted*



- ZT2021-WM8
- Wall-mount, with touch dimmer
 - Neutral white (NW)

ZT2021-WM8-WT-NW white

ZT2021-WM8-NK-NW black

Index

Model	Page
CS700IR	19
CS700IRD	19
CS700PIR	15
CS700PIR	19
CS700TH	19
CS700THD	19
DC700	18
DD24304	20, 32
DS3	17
DS6	17
DT180-EU	21, 32
DT180-UK	21, 32
DT180-US	21, 32
DT24W	21, 32
DT36W	21, 32
DT50	21, 32
E1AJ100	21, 32
EW-100	17
EW-200	17
IR26	18
PLD100ABN-CW	8
PLD100ABN-NW	8
PLD100ABN-WW	8
PLD108ABN-CW	8
PLD108ABN-NW	8
PLD108ABN-WW	8
PLD12ABN-CW	6
PLD12ABN-NW	6
PLD12ABN-WW	6
PLD160ABN-CW	9
PLD160ABN-NW	9
PLD160ABN-WW	9
PLD160NK-CW	9
PLD160NK-NW	9
PLD160NK-WW	9
PLD160WT-CW	9
PLD160WT-NW	9
PLD160WT-WW	9
PLD200ABN-CW	10
PLD200ABN-NW	10
PLD200ABN-WW	10
PLD208ABN-CW	10

Model	Page
PLD208ABN-NW	10
PLD208ABN-WW	10
PLD20ABN-CW	6
PLD20ABN-NW	6
PLD20ABN-WW	6
PLD22ABN-CW	7
PLD22ABN-NW	7
PLD22ABN-WW	7
PLD22NK-CW	7
PLD22NK-NW	7
PLD22NK-WW	7
PLD22WT-CW	7
PLD22WT-NW	7
PLD22WT-WW	7
PLD24ABN-CW	6
PLD24ABN-NW	6
PLD24ABN-WW	6
PLD260ABN-CW	11
PLD260ABN-NW	11
PLD260ABN-WW	11
PLD260NK-CW	11
PLD260NK-NW	11
PLD260NK-WW	11
PLD260WT-CW	11
PLD260WT-NW	11
PLD260WT-WW	11
PLD2703-53NA-CW	15
PLD2703-53NA-NW	15
PLD2703-53NA-WW	15
PLD2703-83NA-CW	15
PLD2703-83NA-NW	15
PLD2703-83NA-WW	15
PLD2711-60ABN-CW	12
PLD2711-60ABN-NW	12
PLD2711-60ABN-WW	12
PLD2711-90ABN-CW	12
PLD2711-90ABN-NW	12
PLD2711-90ABN-WW	12
PLD2721-60ABN-CW	13
PLD2721-60ABN-NW	13
PLD2721-60ABN-WW	13
PLD2721-90ABN-CW	13

Model	Page
PLD2721-90ABN-NW	13
PLD2721-90ABN-WW	13
PLD2731-60ABN-CW	14
PLD2731-60ABN-NW	14
PLD2731-60ABN-WW	14
PLD2731-90ABN-CW	14
PLD2731-90ABN-NW	14
PLD2731-90ABN-WW	14
SCL2711IR-60WT-CW	25
SCL2711IR-60WT-NW	25
SCL2711IR-60WT-WW	25
SCL2711IR-90WT-CW	25
SCL2711IR-90WT-NW	25
SCL2711IR-90WT-WW	25
T100SK-ABN	8
T100SKSL-ABN	8
T100TRH	8
T1220SK-ABN	6, 7
T1220SK-NK	7
T1220SKSL-ABN	6
T1220SK-WT	7
T160SK-ABN	9
T160SK-NK	9
T160SK-WT	9
T200SK-ABN	10
T200SKSL-ABN	10
T260SK-ABN	11
T260SK-NK	11
T260SK-WT	11
TH26	18
WM12W-EU	20, 31
WM12W-UK	20, 31
WM12W-US	20, 31
WM24W-EU	20, 31
WM24W-UK	20, 31
WM24W-US	20, 31
XP2701PIR-80NA-CW	28
XP2701PIR-80NA-NW	28
XP2701PIR-80NA-WW	28
XP2701PIR-90NA-CW	28
XP2701PIR-90NA-NW	28
XP2701PIR-90NA-WW	28

Index

Model	Page
XP2703PIR-54NA-CW	29
XP2703PIR-54NA-NW	29
XP2703PIR-54NA-WW	29
XP2703PIR-83NA-CW	29
XP2703PIR-83NA-NW	29
XP2703PIR-83NA-WW	29
XP2711-60WT-CW	24
XP2711-60WT-NW	24
XP2711-60WT-WW	24
XP2711-90WT-CW	24
XP2711-90WT-NW	24
XP2711-90WT-WW	24
XP2711IR-60WT-CW	24
XP2711IR-60WT-NW	24
XP2711IR-60WT-WW	24
XP2711IR-90WT-CW	24
XP2711IR-90WT-NW	24
XP2711IR-90WT-WW	24
XP2731-60WT-CW	26
XP2731-60WT-NW	26
XP2731-60WT-WW	26
XP2731-90WT-CW	26
XP2731-90WT-NW	26
XP2731-90WT-WW	26
XP2731IR-60WT-CW	26
XP2731IR-60WT-NW	26
XP2731IR-60WT-WW	26
XP2731IR-90WT-CW	26
XP2731IR-90WT-NW	26
XP2731IR-90WT-WW	26
XP2731PIR-60WT-CW	27
XP2731PIR-60WT-NW	27
XP2731PIR-60WT-WW	27
XP2731PIR-90WT-CW	27
XP2731PIR-90WT-NW	27
XP2731PIR-90WT-WW	27
ZT2021-BM9L-NK-NW	33
ZT2021-BM9L-WT-NW	33
ZT2021-BM9R-NK-NW	33
ZT2021-BM9R-WT-NW	33
ZT2021-WM8-NK-NW	33
ZT2021-WM8-WT-NW	33

www.xplendid.com

歡迎上網詢價

Subsidiary offices and showrooms:

Singapore

Xplendid Co., Pte. Ltd.

No. 8 Burn Road #01-02 Trivex Singapore 369977

T +65 6509 0181

F +65 6509 0793

E xplendid888@gmail.com

Taipei, Taiwan

4///Space 康萊 內湖概念店

4th Fl., No. 185, Xinhua 1st Rd., Neihu Dist., Taipei, Taiwan

台北市內湖區新湖一路 185 號4樓

T 02 8791 0997 or 02 2768 8389 #152

E tw@fourwinds.com.tw



康萊興業股份有限公司
FOUR WINDS CORPORATION

11072 台北市基隆路一段176號12樓
12th Fl., No.176, Keelung Rd. Sec.1
Taipei 11072, Taiwan

T +886-2-2768-8389
F +886-2-2768-7955~7
E fw@fourwinds.com.tw