Xplendid®
LED Lighting

XC Ceiling LED Down Light & Spotlight
XC 天花板 LED 崁燈及投射燈

The Versatile Illumination for Space & Life

Xplendid® LED Lighting | Innovation

XC Series, for interior ceiling
全新 XC 系列 LED 照明，適合安裝於天花板

1 | XC LED Down Light & Spotlight page 4 ~ 19

2 | XC Flexible or Swivel Arm LED Spotlight & Pendant Light page 20 ~ 24

3 | XC LED Linear Light & Cove Light page 25 ~ 32

Xplendid® XC LED Down Light & Spotlight 頂級 LED 崁燈及投射燈

1. Luminant CREE XLamp® LEDs with single optical dome or array of 9 Vdc / 12 Vdc / 36 Vdc
   採用高亮度 CREE XLamp® 單眼式 LED 晶粒

CREE

9 Vdc
MHB-A

12 Vdc
XHP50



36 Vdc
MHD-G

36 Vdc
MT-G2

2. Pure aluminium fixture in **white** or **black** enamel, highly effective in heat dissipating to keep long lifespan of LED module and to upgrade the efficacy of LED
   全鋁合金燈具, 最佳散熱結構, 提昇 LED 壽命並降低光衰程度

3. High power yet smooth array and glare-free illumination with reflector or optical lens
   搭配二次光學 (透鏡及反射片), 讓 LED 燈的光線亮度均勻而不刺眼, 且不會產生疊影

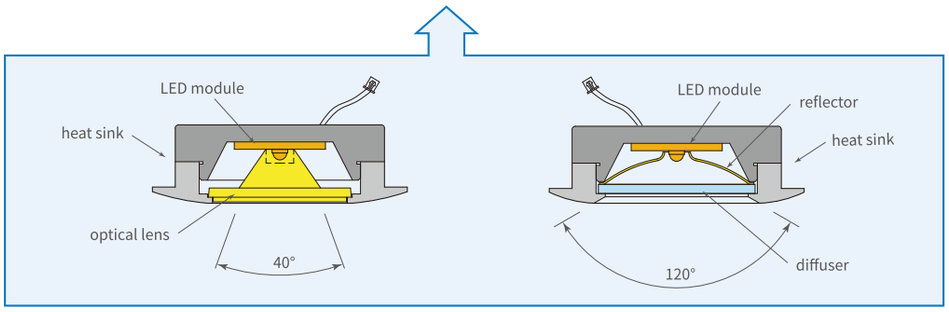

4. 3 ways of illumination:
   三種照射方式:

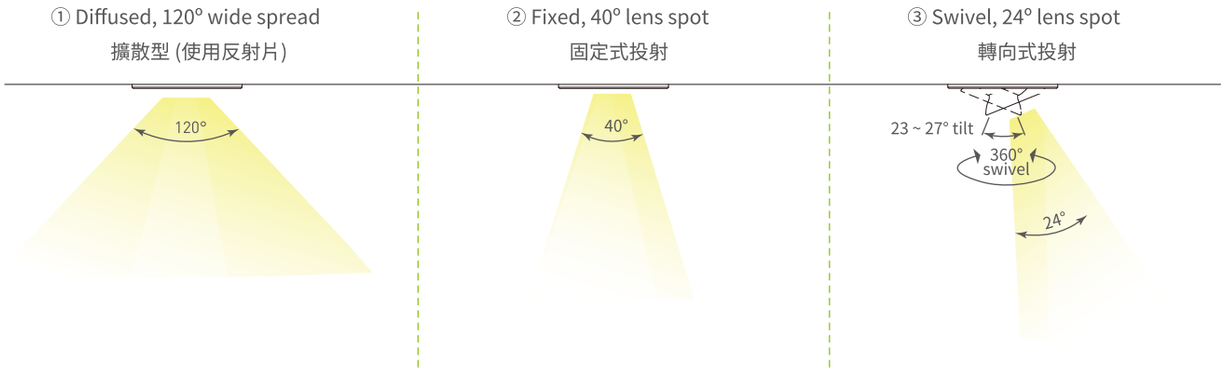

Xplendid® XC LED Down Light & Spotlight 頂級 LED 崁燈及投射燈

* 10 years lifespan, 3 years guarantee under normal usage
  產品正常使用下可保持十年以上壽命, 三年保固

* Superb energy saving, all with high efficacy Cree XLamp® LED. 80 ~ 120 lm/w (lumens per watt)
  內置高效能 Cree XLamp® LED 80 ~ 120 lm/w, 超省電

* Maintenance almost free, easy replacement for the power supply and LED component.
  LED 電源及零組件更換容易, 幾乎不需維護

5.5 watts

* Ideal for 1.5 ~ 2 meter hight
  適合 1.5 至 2 公尺天花板高度

Model:
XC110 / 140 / 190
SCL110 / SCL140

8.5 watts

* Ideal for 2 ~ 2.5 meter hight
  適合 2 至 2.5 公尺天花板高度

Model:
XC210 / 240 / 290 / 21012 / 24012 / 29012
SCL210 / SCL240

12.5 watts

* Ideal for 2.5 ~ 3 meter hight
  適合 2.5 至 3 公尺天花板高度

Model:
XC310 / 340 / 390 / 380 / 384 / 389 / 38012 / 38412 / 38912

16 watts

* Ideal for 3 ~ 4 meter hight
  適合 3 至 4 公尺天花板高度

Model:
XC410 / XC440 / XC490 / 610-35 / 640-35 / 810-35 / 840-35 / 890-35

21 watts

* Ideal for 4 ~ 5 meter hight
  適合 4 至 4.5 公尺天花板高度

Model:
XC510 / XC540 / XC590 / 610-45 / 640-45 / 840-45 / 840-45 / 890-45 / 8112-35 / 8412-35 / 8912-35

XC110WT

XC140WT

XC190WT

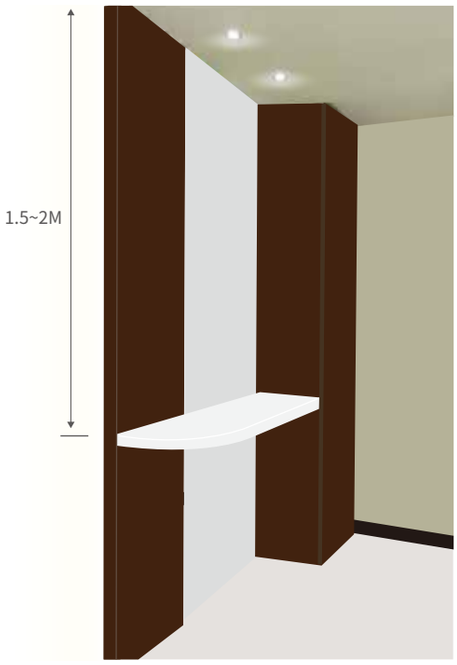

5.5W LED Down Light & Spotlight

XC110, XC140 & XC190

- Power consumption: 9 Vdc 0.45A constant current
- Ideal illumination height: 1.5 ~ 2 meters
- White lighting fixture, solid aluminium
- Drillhole: **Ø55mm (Ø2-5/32")**, recessed mounting
- Complete with LED driver 100 ~ 240 Vac 50 / 60 Hz

Illustration	Model	
XC110WT 	**XC110 5.5W LED Down Light** • Diffused	
	XC110WT-WW	warm white
	XC110WT-NW	neutral white
	XC110WT-CW	cool white
XC140WT 	**XC140 5.5W LED Spotlight** • 40° spot, non-swivel	
	XC140WT-WW	warm white
	XC140WT-NW	neutral white
	XC140WT-CW	cool white
XC190WT 	**XC190 5.5W LED Swivel Spotlight** • 24° spot, 25° tilt & 360° swivel	
	XC190WT-WW	warm white
	XC190WT-NW	neutral white
	XC190WT-CW	cool white

SCL110WT

SCL140WT

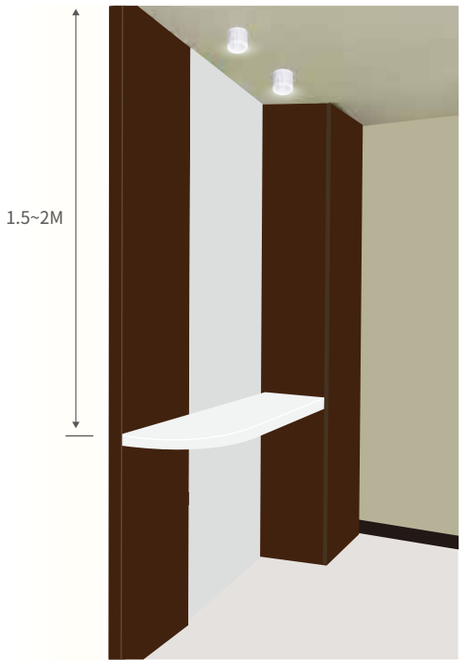

Surface Mount 5.5W LED Down Light & Spotlight

SCL110 & SCL140

- Power consumption: 9 Vdc 0.45A constant current
- Ideal illumination height: 1.5 ~ 2 meters
- White lighting fixture, solid aluminium
- Surface mounting
- Complete with LED driver 100 ~ 240 Vac 50 / 60 Hz

Illustration		Model	
SCL110WT		**SCL110 Surface Mount 5.5W LED Down Light** • Diffused	
		SCL110WT-WW	warm white
		SCL110WT-NW	neutral white
		SCL110WT-CW	cool white
SCL140WT		**SCL140 Surface Mount 5.5W LED Spotlight** • 40° spot, non-swivel	
		SCL140WT-WW	warm white
		SCL140WT-NW	neutral white
		SCL140WT-CW	cool white

XC210WT

XC240WT

XC290WT

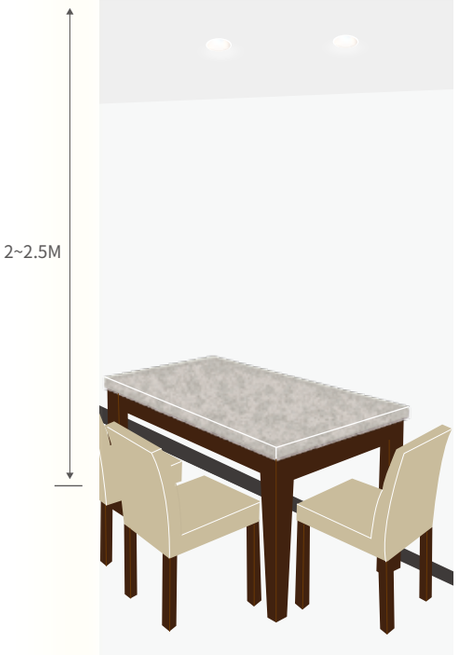

8.5W LED Down Light & Spotlight

XC210, XC240 & XC290

- Power consumption: 9 Vdc 0.7A constant current
- Ideal illumination height: 2 ~ 2.5 meters
- White lighting fixture, solid aluminium
- Drillhole: **Ø70mm (Ø2-3/4")**, recessed mounting
- Complete with LED driver 100 ~ 240 Vac 50 / 60 Hz

Illustration		Model	
XC210WT		**XC210 8.5W LED Down Light** • Diffused	
		XC210WT-WW	warm white
		XC210WT-NW	neutral white
		XC210WT-CW	cool white
XC240WT		**XC240 8.5W LED Spotlight** • 40° spot, non-swivel	
		XC240WT-WW	warm white
		XC240WT-NW	neutral white
		XC240WT-CW	cool white
XC290WT		**XC290 8.5W LED Swivel Spotlight** • 24° spot, 27° tilt & 360° swivel	
		XC290WT-WW	warm white
		XC290WT-NW	neutral white
		XC290WT-CW	cool white

SCL210WT

SCL240WT

Surface Mount 8.5W LED Down Light & Spotlight

SCL210 & SCL240

- Power consumption: 9 Vdc 0.7A constant current
- Ideal illumination height: 2 ~ 2.5 meters
- White lighting fixture, solid aluminium
- Surface mounting
- Complete with LED driver 100 ~ 240 Vac 50 / 60 Hz

Illustration		Model	
SCL210WT		**SCL210 Surface Mount 8.5W LED Down Light** • Diffused	
		SCL210WT-WW	warm white
		SCL210WT-NW	neutral white
		SCL210WT-CW	cool white
SCL240WT		**SCL240 Surface Mount 8.5W LED Spotlight** • 40° spot, non-swivel	
		SCL240WT-WW	warm white
		SCL240WT-NW	neutral white
		SCL240WT-CW	cool white

XC310WT

XC340WT

XC390WT

12.5W LED Down Light & Spotlight

XC310, XC340 & XC390

- Power consumption: 12 Vdc 0.8A constant current
- Ideal illumination height: 2.5 ~ 3 meters
- White lighting fixture, solid aluminium
- Drillhole: **Ø80mm (Ø3-1/8")**, recessed mounting
- Complete with LED driver 100 ~ 240 Vac 50 / 60 Hz

Illustration		Model	
XC310WT		**XC310 12.5W LED Down Light** • Diffused	
		XC310WT-WW	warm white
		XC310WT-NW	neutral white
		XC310WT-CW	cool white
XC340WT		**XC340 12.5W LED Spotlight** • 40° spot, non-swivel	
		XC340WT-WW	warm white
		XC340WT-NW	neutral white
		XC340WT-CW	cool white
XC390WT		**XC390 12.5W LED Swivel Spotlight** • 24° spot, 23° tilt & 360° swivel	
		XC390WT-WW	warm white
		XC390WT-NW	neutral white
		XC390WT-CW	cool white

XC380WT

XC384WT

XC389WT

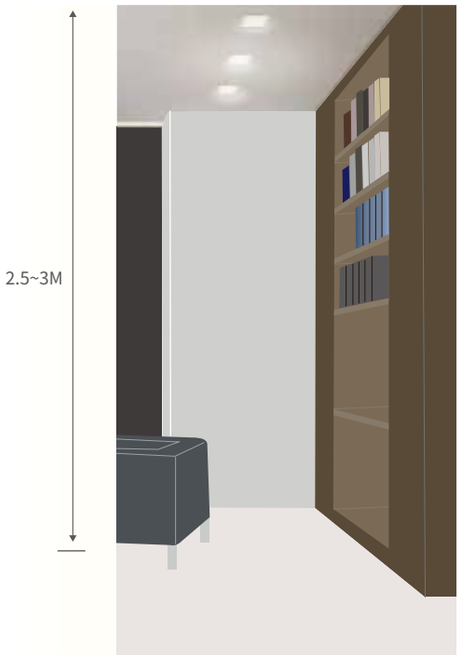

12.5W Square LED Down Light & Spotlight

XC380, XC384 & XC389

- Power consumption: 12 Vdc 0.8A constant current
- Ideal illumination height: 2.5 ~ 3 meters
- White lighting fixture, solid aluminium
- Drillhole: **Ø80mm (Ø3-1/8")**, recessed mounting
- Complete with LED driver 100 ~ 240 Vac 50 / 60 Hz

Illustration		Model	
XC380WT		**XC380 12.5W Square LED Down Light** • Diffused	
		XC380WT-WW	warm white
		XC380WT-NW	neutral white
		XC380WT-CW	cool white
XC384WT		**XC384 12.5W Square LED Spotlight** • 40° spot, non-swivel	
		XC384WT-WW	warm white
		XC384WT-NW	neutral white
		XC384WT-CW	cool white
XC389WT		**XC389 12.5W Square LED Swivel Spotlight** • 24° spot, 23° tilt & 360° swivel	
		XC389WT-WW	warm white
		XC389WT-NW	neutral white
		XC389WT-CW	cool white

XC410WT

XC440WT

XC490WT

16W LED Down Light & Spotlight

XC410, XC440 & XC490

- Power consumption: 37 Vdc 0.35A constant current
- Ideal illumination height: 3 ~ 4 meters
- White lighting fixture, solid aluminium
- Drillhole: **Ø100mm (Ø4")**, recessed mounting
- Complete with LED driver 100 ~ 240 Vac 50 / 60 Hz

Illustration		Model	
XC410WT		**XC410 16W LED Down Light** • Diffused	
		XC410WT-WW	warm white
		XC410WT-NW	neutral white
		XC410WT-CW	cool white
XC440WT		**XC440 16W LED Spotlight** • 40° spot, non-swivel	
		XC440WT-WW	warm white
		XC440WT-NW	neutral white
		XC440WT-CW	cool white
XC490WT		**XC490 16W LED Swivel Spotlight** • 24° spot, 24° tilt & 360° swivel	
		XC490WT-WW	warm white
		XC490WT-NW	neutral white
		XC490WT-CW	cool white

XC510WT

XC540WT

XC590WT

21W LED Down Light & Spotlight

XC510, XC540 & XC590

- Power consumption: 37 Vdc 0.45A constant current
- Ideal illumination height: 4 ~ 5 meters
- White lighting fixture, solid aluminium
- Drillhole: **Ø125mm (Ø5")**, recessed mounting
- Complete with LED driver 100 ~ 240 Vac 50 / 60 Hz

Illustration		Model	
XC510WT		**XC510 21W LED Down Light** • Diffused	
		XC510WT-WW	warm white
		XC510WT-NW	neutral white
		XC510WT-CW	cool white
XC540WT		**XC540 21W LED Spotlight** • 40° spot, non-swivel	
		XC540WT-WW	warm white
		XC540WT-NW	neutral white
		XC540WT-CW	cool white
XC590WT		**XC590 21W LED Swivel Spotlight** • 24° spot, 26° tilt & 360° swivel	
		XC590WT-WW	warm white
		XC590WT-NW	neutral white
		XC590WT-CW	cool white

XC610-35WT

XC640-35WT

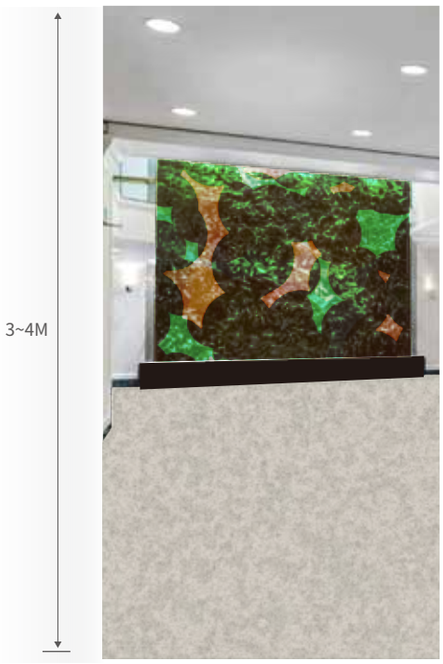

16W LED Down Light & Spotlight

XC610-35 & XC640-35

- Power consumption: 37 Vdc 0.35A constant current
- Ideal illumination height: 3 ~ 4 meters
- White lighting fixture, solid aluminium
- Drillhole: **Ø150mm** (**Ø6"**), recessed mounting
- Complete with LED driver 100 ~ 240 Vac 50 / 60 Hz

Illustration		Model
XC610-35WT		**XC610-35 16W LED Down Light** • Diffused
		XC610-35WT-WW warm white XC610-35WT-NW neutral white XC610-35WT-CW cool white
XC640-35WT		**XC640-35 16W LED Spotlight** • 40° spot, non-swivel
		XC640-35WT-WW warm white XC640-35WT-NW neutral white XC640-35WT-CW cool white

XC810-35WT

XC840-35WT

XC890-35WT

16W Square LED Down Light & Spotlight

XC810-35, XC840-35 & XC890-35

- Power consumption: 37 Vdc 0.35A constant current
- Ideal illumination height: 3 ~ 4 meters
- White lighting fixture, solid aluminium
- Cut size: **115x115mm (4-1/2 x 4-1/2")**, recessed mounting
- Complete with LED driver 100 ~ 240 Vac 50 / 60 Hz

Illustration		Model
XC810-35WT		**XC810-35 16W Square LED Down Light** • Diffused
		XC810-35WT-WW warm white
		XC810-35WT-NW neutral white
		XC810-35WT-CW cool white
XC840-35WT		**XC840-35 16W Square LED Spotlight** • 40° spot, non-swivel
		XC840-35WT-WW warm white
		XC840-35WT-NW neutral white
		XC840-35WT-CW cool white
XC890-35WT		**XC890-35 16W Square LED Swivel Spotlight** • 24° spot, 24° tilt & 360° swivel
		XC890-35WT-WW warm white
		XC890-35WT-NW neutral white
		XC890-35WT-CW cool white

XC610-45BK

XC640-45BK

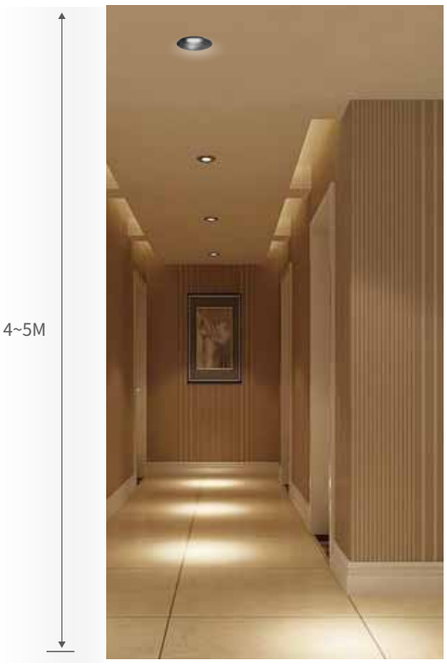

21W LED Down Light & Spotlight

XC610-45 & XC640-45

- Power consumption: 37 Vdc 0.45A constant current
- Ideal illumination height: 4 ~ 5 meters
- Black lighting fixture, solid aluminium
- Drillhole: **Ø150mm (Ø6")**, recessed mounting
- Complete with LED driver 100 ~ 240 Vac 50 / 60 Hz

Illustration		Model	
XC610-45BK		**XC610-45 21W LED Down Light** • Diffused	
		XC610-45BK-WW	warm white
		XC610-45BK-NW	neutral white
		XC610-45BK-CW	cool white
XC640-45BK		**XC640-45 21W LED Spotlight** • 40° spot, non-swivel	
		XC640-45BK-WW	warm white
		XC640-45BK-NW	neutral white
		XC640-45BK-CW	cool white

XC810-45BK

XC840-45BK

XC890-45BK

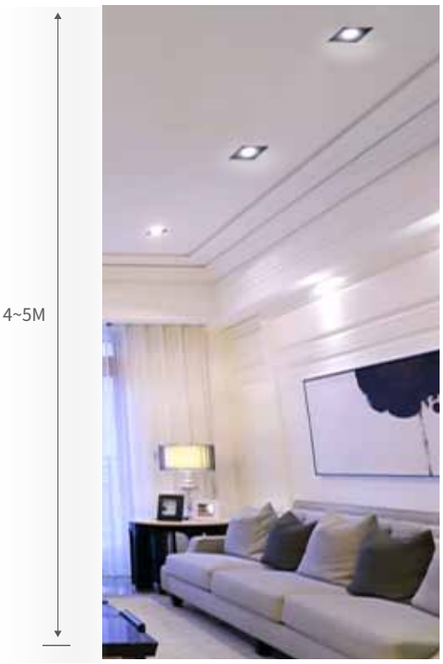

21W Square LED Down Light & Spotlight

XC810-45, XC840-45 & XC890-45

- Power consumption: 37 Vdc 0.45A constant current
- Ideal illumination height: 4 ~ 5 meters
- White lighting fixture, solid aluminium
- Cut size: **115x115mm (4-1/2 x 4-1/2")**, recessed mounting
- Complete with LED driver 100 ~ 240 Vac 50 / 60 Hz

Illustration		Model	
XC810-45BK		**XC810-45 21W Square LED Down Light** • Diffused	
		XC810-45BK-WW	warm white
		XC810-45BK-NW	neutral white
		XC810-45BK-CW	cool white
XC840-45BK		**XC840-45 21W Square LED Spotlight** • 40° spot, non-swivel	
		XC840-45BK-WW	warm white
		XC840-45BK-NW	neutral white
		XC840-45BK-CW	cool white
XC890-45BK		**XC890-45 21W Square LED Swivel Spotlight** • 24° spot, 24° tilt & 360° swivel	
		XC890-45BK-WW	warm white
		XC890-45BK-NW	neutral white
		XC890-45BK-CW	cool white

XC8412-35WT

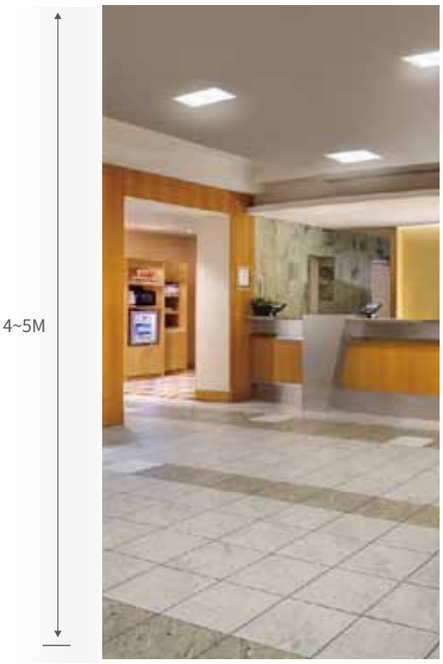

Dual 16W LED Down Light & Spotlight

XC8112-35, XC8412-35 & XC8912-35

- Power consumption: 2 x 37 Vdc 0.35A constant current
- White lighting fixture, solid aluminium
- Cut size: (L) **230 x (W) 115mm**, recessed mounting
- Complete with LED driver 100 ~ 240 Vac 50 / 60 Hz

Illustration		Model	
XC8112-35WT		**XC8112-35 Dual 16W LED Down Light** • Diffused	
		XC8112-35WT-WW	warm white
		XC8112-35WT-NW	neutral white
		XC8112-35WT-CW	cool white
XC8412-35WT		**XC8412-35 Dual 16W LED Spotlight** • 40° spot, non-swivel	
		XC8412-35WT-WW	warm white
		XC8412-35WT-NW	neutral white
		XC8412-35WT-CW	cool white
XC8912-35WT		**XC8912-35 Dual 16W LED Swivel Spotlight** • 24° spot, 24° tilt & 360° swivel	
		XC8912-35WT-WW	warm white
		XC8912-35WT-NW	neutral white
		XC8912-35WT-CW	cool white

X2102PIR-WT

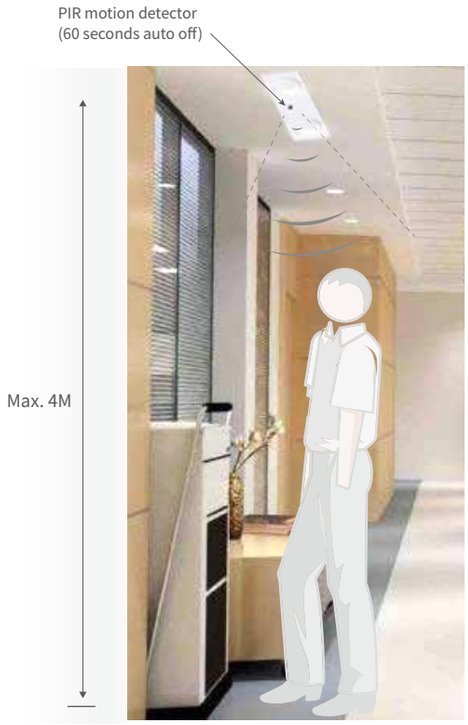

Dual 8.5W LED Down Light with PIR Motion Detector

XC2102PIR, XC2402PIR & XC2902PIR

- Power consumption: 2 x 9 Vdc 0.7A constant current
- With one PIR motion detector maximum 4 meters detect distance 60 seconds auto off
- Cut size: (L) 340 x (W) 80mm, recessed mounting
- Includes one switching AC/DC adapter, 100 ~ 240 Vac 50 / 60Hz

Illustration	Model	
XC2102PIR-WT 	**XC2102PIR Dual 8.5W LED Down Light** • Diffused	
	XC2102PIR-WT-WW	warm white
	XC2102PIR-WT-NW	neutral white
	XC2102PIR-WT-CW	cool white
XC2402PIR-WT 	**XC2402PIR Dual 8.5W LED Spotlight** • 40° spot, non-swivel	
	XC2402PIR-WT-WW	warm white
	XC2402PIR-WT-NW	neutral white
	XC2402PIR-WT-CW	cool white
XC2902PIR-WT 	**XC2902PIR Dual 8.5W LED Swivel Spotlight** • 24° spot, 27° tilt & 360° swivel	
	XC2902PIR-WT-WW	warm white
	XC2902PIR-WT-NW	neutral white
	XC2902PIR-WT-CW	cool white

Xplendid® XC Flexible and Swivel Arm LED Spotlight & Pendant LED Down Light
懸臂轉向式投射燈及吊燈

＊ 8.5 watts LED spotlight with 24° optical lens
＊ Illumination distance approx. 2 meters

＊ 3 different mounting methods. 三種安裝方式

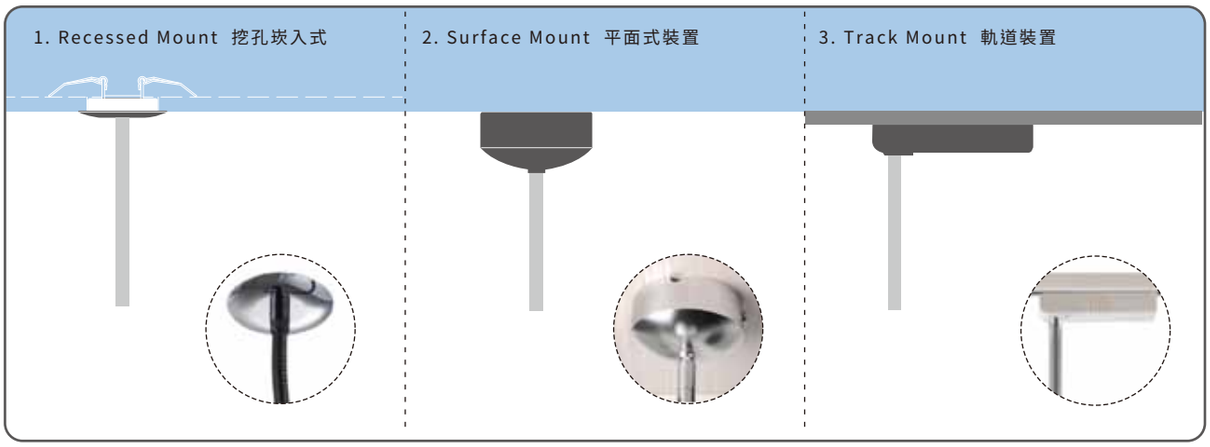

＊ Arm light 懸臂燈

＊ Pendant light 吊燈

SCL-FL25-97BK

RCL-FL25-97BK

TRK-FL25-97BK

8.5W LED Flexible Arm Spotlight

FL25-97

- Power consumption: 9 Vdc 0.7A constant current
- With 24° spot lens, illumination distance approx. 2 meters
- With 25cm flexible arm, all black
- With LED power supply 100 ~ 240 Vac 50 / 60 Hz

Illustration		Model	
SCL-FL25-97BK		**SCL-FL25-97BK** • Surface mount	
		SCL-FL25-97BK-WW	warm white
		SCL-FL25-97BK-NW	neutral white
		SCL-FL25-97BK-CW	cool white
RCL-FL25-97BK		**RCL-FL25-97BK** • Recessed mount	
		RCL-FL25-97BK-WW	warm white
		RCL-FL25-97BK-NW	neutral white
		RCL-FL25-97BK-CW	cool white
TRK-FL25-97BK		**TRK-FL25-97BK** • Track mount	
		TRK-FL25-97BK-WW	warm white
		TRK-FL25-97BK-NW	neutral white
		TRK-FL25-97BK-CW	cool white

SCL-SWT140

RCL-SWT140

TRK-SWT140

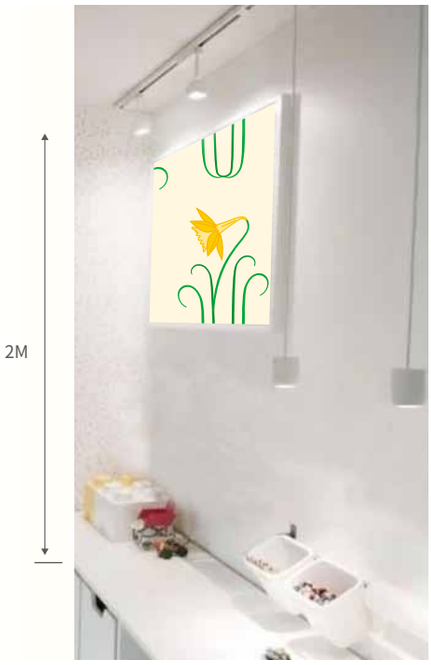

8.5W LED Swivel Arm Cylindrical Spotlight

SWT140

- Power consumption: 9 Vdc 0.7A constant current
- 40° spotlight, illumination distance approx. 2 meters
- With 360° swivel arm
- Aluminium lighting fixture in white
- With LED power supply 100 ~ 240 Vac 50 / 60Hz

Illustration		Model	
SCL-SWT140WT		**SCL-SWT140WT** • Surface mount	
		SCL-SWT140WT-WW	warm white
		SCL-SWT140WT-NW	neutral white
		SCL-SWT140WT-CW	cool white
RCL-SWT140WT		**RCL-SWT140WT** • Recessed mount	
		RCL-SWT140WT-WW	warm white
		RCL-SWT140WT-NW	neutral white
		RCL-SWT140WT-CW	cool white
TRK-SWT140WT		**TRK-SWT140WT** • Track mount	
		TRK-SWT140WT-WW	warm white
		TRK-SWT140WT-NW	neutral white
		TRK-SWT140WT-CW	cool white

8.5W LED Long Swivel Arm Cylindrical Spotlight
SWT20-140

- Power consumption: 9 Vdc 0.7A constant current
- 40° spotlight, illumination distance approx. 2 meters
- 200mm L. arm and 360° swivel
- Aluminium lighting fixture in white
- With LED power supply 100 ~ 240 Vac 50 / 60Hz

Illustration		Model	
SCL-SWT20-140WT		**SCL-SWT20-140WT** • Surface mount	
		SCL-SWT20-140WT-WW	warm white
		SCL-SWT20-140WT-NW	neutral white
		SCL-SWT20-140WT-CW	cool white
RCL-SWT20-140WT		**RCL-SWT20-140WT** • Recessed mount	
		RCL-SWT20-140WT-WW	warm white
		RCL-SWT20-140WT-NW	neutral white
		RCL-SWT20-140WT-CW	cool white
TRK-SWT20-140WT		**TRK-SWT20-140WT** • Track mount	
		TRK-SWT20-140WT-WW	warm white
		TRK-SWT20-140WT-NW	neutral white
		TRK-SWT20-140WT-CW	cool white

8.5W LED Pendant Cylindrical Light

PNT110

- Power consumption: 9 Vdc 0.7A constant current
- Diffused light, ideal illumination height: 1 ~ 1.5 meters
- With 1.5 meter fiber glass wire (can be shortened to 0.5 meter)
- Aluminium lighting fixture in white
- With LED power supply 100 ~ 240 Vac 50 / 60Hz

Illustration	Model	
SCL-PNT110WT 	**SCL-PNT110WT** • Surface mount	
	SCL-PNT110WT-WW	warm white
	SCL-PNT110WT-NW	neutral white
	SCL-PNT110WT-CW	cool white
TRK-PNT110WT 	**TRK-PNT110WT** • Track mount	
	TRK-PNT110WT-WW	warm white
	TRK-PNT110WT-NW	neutral white
	TRK-PNT110WT-CW	cool white

Xplendid® XC LED Linear Light & Cove Light 頂級 LED 長條燈及間接照明

＊ 10 years lifespan, 3 years guarantee under normal usage
產品正常使用下可保持十年以上壽命, 三年保固

＊ Maintenance almost free, easy replacement for the power supply and LED component.
LED 電源及零組件更換容易, 幾乎不需維護

LED Linear Light

8.5 watts ＊ Ideal for 1.5 ~ 2 meter hight 適合 1.5 至 2 公尺天花板高度

Recessed mount

Surface mount

Suspension & pendant

Model:
RCL2711 / SCL2711 / PNT2711

17 watts ＊ Ideal for 2.5 ~ 3.5 meter hight 適合 2.5 至 3.5 公尺天花板高度

Recessed mount

Surface mount

Suspension

Model:
RCL2811 / SCL2811 / SM20-2811 / RM20-2811

LED Linear Cove Light

簷內 LED 間接照明

＊ Slanted ＊ Level

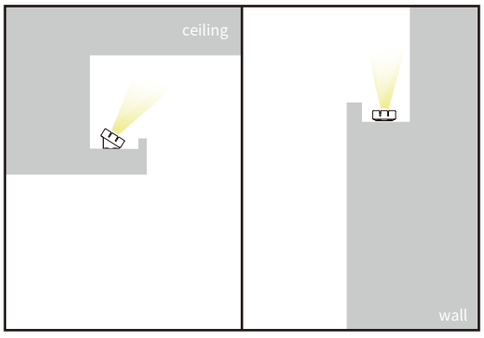

8.5 watts ＊ L= 503mm

17 watts ＊ L= 1103mm

RCL2811-90NK

SCL2811LD-90NK

17W LED Linear Light

RCL2811-90NK Recessed Mounting

SCL2811LD-90NK Surface Mounting

- Power consumption: 27 Vdc 0.45A constant current
- Ideal illumination height: 2.5 ~ 3.5 meters
- Extruded aluminium housing in black (NK)
- Including LED power supply 100 ~ 240Vac 50 / 60Hz

Illustration	Model
RCL2811-90NK	**RCL2811-90NK** • 863mm L. recessed mounting, 17W • Cut size: (L) 844 x (W) 37mm
SCL2811LD-90NK	**SCL2811LD-90NK** • Surface mounting, 17W • Aluminium housing 1,016mm L.

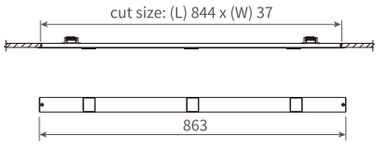



RCL2811-90NK-WW	warm white
RCL2811-90NK-NW	neutral white
RCL2811-90NK-CW	cool white

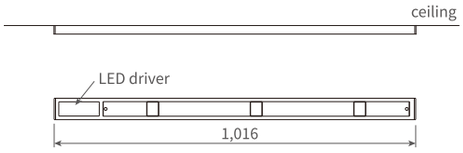



SCL2811LD-90NK-WW	warm white
SCL2811LD-90NK-NW	neutral white
SCL2811LD-90NK-CW	cool white

RM20-2811-90NK

SM20-2811-90NK

17W LED Suspension Linear Light

- Power consumption: 27 Vdc 0.45A constant current
- Ideal illumination height: 2.5 ~ 3.5 meters
- Aluminium lighting fixture in black (NK)
- With aluminium rod (Ø12.8x200mmL.)
- Including LED power supply 100 ~ 240Vac 50 / 60Hz

Illustration	Model	
SM20-2811-90NK 	**SM20-2811-90NK** • Surface mounting 	
	SM20-2811-90NK-WW	warm white
	SM20-2811-90NK-NW	neutral white
	SM20-2811-90NK-CW	cool white
RM20-2811-90NK 	**RM20-2811-90NK** • Recessed mounting • Cut size: (L) 270 x (W) 52mm 	
	RM20-2811-90NK-WW	warm white
	RM20-2811-90NK-NW	neutral white
	RM20-2811-90NK-CW	cool white

RCL2711-90NA

SCL2711LD-90NA

8.5W LED Linear Light

RCL2711-90 Recessed Mounting

SCL2711LD-90 Surface Mounting

- Power consumption: 9 Vdc 0.7A constant current
- Ideal illumination height: 1.5 ~ 2 meters
- Aluminium housing in matt silver (NA)
- Including LED power supply 100 ~ 240Vac 50 / 60Hz

Illustration	Model

RCL2711-90NA

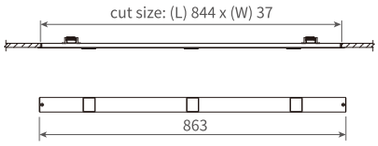

RCL2711-90NA

- 863mm L. recessed mounting, 8.5W
- Cut size: (L) 844 x (W) 37mm



RCL2711-90NA-WW	warm white
RCL2711-90NA-NW	neutral white
RCL2711-90NA-CW	cool white

SCL2711LD-90NA

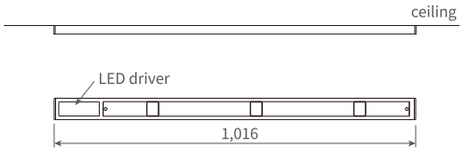

SCL2711LD-90NA

- Surface mounting, 8.5W
- Aluminium case 1,016 L.



SCL2711LD-90NA-WW	warm white
SCL2711LD-90NA-NW	neutral white
SCL2711LD-90NA-CW	cool white

RCL2711PIR-90NA

RM20-2711PIR-90NA
SM20-2711PIR-90NA

8.5W LED Linear Light, with PIR motion detector

- Power consumption: 9 Vdc 0.7A constant current
- With one PIR motion detector maximum 4 meters detect distance 60 sceonds auto off
- Aluminium housing in matt silver (NA)
- Including LED power supply 100 ~ 240Vac 50 / 60Hz

Illustration		Model
RCL2711PIR-90NA	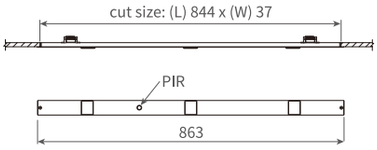	**RCL2711PIR-90NA** • 863mm L. recessed mounting • Cut size: (L) 844 x (W) 37mm  RCL2711PIR-90NA-WW warm white RCL2711PIR-90NA-NW neutral white RCL2711PIR-90NA-CW cool white
RM20-2711PIR-90NA		**RM20-2711PIR-90NA** • Recessed mounting, cut size: (L) 270 x (W) 52mm • With aluminium rod (Ø12.8 x 200mm L.)  RM20-2711PIR-90NA-WW warm white RM20-2711PIR-90NA-NW neutral white RM20-2711PIR-90NA-CW cool white
SM20-2711PIR-90NA		**SM20-2711PIR-90NA** • Surface mounting • With aluminium rod (Ø12.8 x 200mm L.)  SM20-2711PIR-90NA-WW warm white SM20-2711PIR-90NA-NW neutral white SM20-2711PIR-90NA-CW cool white

SM100-2711-90NA

8.5W LED Pendant Linear Light

- Power consumption: 9 Vdc 0.7A constant current
- Ideal illumination height: 1 ~ 2 meters
- Aluminium lighting fixture in matt silver (NA)
- Including LED power supply 100 ~ 240Vac 50 / 60Hz



Illustration		Model	
SM100-2711-90NA		**SM100-2711-90NA** • Surface mounting • With aluminium rod (ø12.8 x 1,000mm L.)	
		SM100-2711-90NA-WW	warm white
		SM100-2711-90NA-NW	neutral white
		SM100-2711-90NA-CW	cool white
SM-PNT2711-90NA		**SM-PNT2711-90NA** • Surface mounting • With fiber glass wire (1,500mm L.)	
		SM-PNT2711-90NA-WW	warm white
		SM-PNT2711-90NA-NW	neutral white
		SM-PNT2711-90NA-CW	cool white
TRK-PNT2711-90NA		**TRK-PNT2711-90NA** • Track rail mounting • With fiber glass wire (1,500mm L.)	
		TRK-PNT2711-90NA-WW	warm white
		TRK-PNT2711-90NA-NW	neutral white
		TRK-PNT2711-90NA-CW	cool white

PNT2711FOK-90ABN

8.5W LED Pendant Linear Light, Oak Shell

- Power consumption: 9 Vdc 0.7A constant current
- Ideal illumination height: 1 ~ 2 meters
- Aluminium housing in brushed stainless (ABN), with oak shell 900mm L.
- Including LED power supply 100 ~ 240Vac 50 / 60Hz



Illustration		Model	
SM100-2711FOK-90ABN		**SM100-2711FOK-90ABN** • Surface mounting • With aluminium rod (ø12.8 x 1,000mm L.)	
		SM100-2711FOK-90ABN-WW	warm white
		SM100-2711FOK-90ABN-NW	neutral white
		SM100-2711FOK-90ABN-CW	cool white
SM-PNT2711FOK-90ABN		**SM-PNT2711FOK-90ABN** • Surface mounting • With fiber glass wire (1,500mm L.)	
		SM-PNT2711FOK-90ABN-WW	warm white
		SM-PNT2711FOK-90ABN-NW	neutral white
		SM-PNT2711FOK-90ABN-CW	cool white
TRK-PNT2711FOK-90ABN		**TRK-PNT2711FOK-90ABN** • Track rail mounting • With fiber glass wire (1,500mm L.)	
		TRK-PNT2711FOK-90ABN-WW	warm white
		TRK-PNT2711FOK-90ABN-NW	neutral white
		TRK-PNT2711FOK-90ABN-CW	cool white

CVE2717-50NA

8.5W or 17W LED Linear Cove Light 簷內 LED 間接照明

CVE2717 series

- Power consumption: 9 Vdc or 18 Vdc 0.7A constant current
- Aluminium housing in matt silver (NA)
- Screw fixing with steel spring mounting brackets, slanted or level type, 2 pcs/set
- Including LED power supply 100 ~ 240 Vac 50 / 60Hz

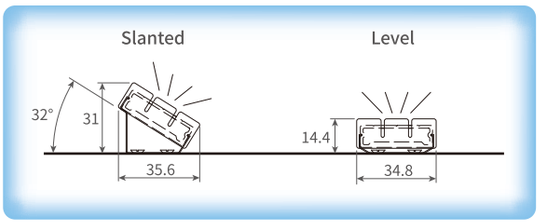

Illustration	Model	
CVE2717-50NA	**CVE2717-50NA** • 8.5 watts (3 x 3Vdc / 0.7A)	
	CVE2717-50NA-WW	warm white
	CVE2717-50NA-NW	neutral white
	CV2717-50NA-CW	cool white
CVE2717-110NA 	**CVE2717-110NA** • 17 watts (6 x 3Vdc / 0.7A)	
	CVE2717-110NA-WW	warm white
	CVE2717-110NA-NW	neutral white
	CVE2717-110NA-CW	cool white

Index

Model	Page
CVE2717-110NA-CW	32
CVE2717-110NA-NW	32
CVE2717-110NA-WW	32
CVE2717-50NA-CW	32
CVE2717-50NA-NW	32
CVE2717-50NA-WW	32
RCL2711-90NA-CW	28
RCL2711-90NA-NW	28
RCL2711-90NA-WW	28
RCL2711PIR-90NA-CW	29
RCL2711PIR-90NA-NW	29
RCL2711PIR-90NA-WW	29
RCL2811-90NK-CW	26
RCL2811-90NK-NW	26
RCL2811-90NK-WW	26
RCL-FL25-97BK-CW	21
RCL-FL25-97BK-NW	21
RCL-FL25-97BK-WW	21
RCL-SWT140WT-CW	22
RCL-SWT140WT-NW	22
RCL-SWT140WT-WW	22
RCL-SWT20-140WT-CW	23
RCL-SWT20-140WT-NW	23
RCL-SWT20-140WT-WW	23
RM20-2711PIR-90NA-CW	29
RM20-2711PIR-90NA-NW	29
RM20-2711PIR-90NA-WW	29
RM20-2811-90NK-CW	27
RM20-2811-90NK-NW	27
RM20-2811-90NK-WW	27
SCL110WT-CW	7
SCL110WT-NW	7
SCL110WT-WW	7
SCL140WT-CW	7
SCL140WT-NW	7
SCL140WT-WW	7
SCL210WT-CW	9
SCL210WT-NW	9
SCL210WT-WW	9
SCL240WT-CW	9
SCL240WT-NW	9
SCL240WT-WW	9

Model	Page
SCL2711LD-90NA-CW	28
SCL2711LD-90NA-NW	28
SCL2711LD-90NA-WW	28
SCL2811LD-90NK-CW	26
SCL2811LD-90NK-NW	26
SCL2811LD-90NK-WW	26
SCL-FL25-97BK-CW	21
SCL-FL25-97BK-NW	21
SCL-FL25-97BK-WW	21
SCL-PNT110WT-CW	24
SCL-PNT110WT-NW	24
SCL-PNT110WT-WW	24
SCL-SWT140WT-CW	22
SCL-SWT140WT-NW	22
SCL-SWT140WT-WW	22
SCL-SWT20-140WT-CW	23
SCL-SWT20-140WT-NW	23
SCL-SWT20-140WT-WW	23
SM100-2711-90NA-CW	30
SM100-2711-90NA-NW	30
SM100-2711-90NA-WW	30
SM100-2711FOK-90ABN-CW	31
SM100-2711FOK-90ABN-NW	31
SM100-2711FOK-90ABN-WW	31
SM20-2711PIR-90NA-CW	29
SM20-2711PIR-90NA-NW	29
SM20-2711PIR-90NA-WW	29
SM20-2811-90NK-CW	27
SM20-2811-90NK-NW	27
SM20-2811-90NK-WW	27
SM-PNT2711-90NA-CW	30
SM-PNT2711-90NA-NW	30
SM-PNT2711-90NA-WW	30
SM-PNT2711FOK-90ABN-CW	31
SM-PNT2711FOK-90ABN-NW	31
SM-PNT2711FOK-90ABN-WW	31
TRK-FL25-97BK-CW	21
TRK-FL25-97BK-NW	21
TRK-FL25-97BK-WW	21
TRK-PNT110WT-CW	24
TRK-PNT110WT-NW	24
TRK-PNT110WT-WW	24

Model	Page
TRK-PNT2711-90NA-CW	30
TRK-PNT2711-90NA-NW	30
TRK-PNT2711-90NA-WW	30
TRK-PNT2711FOK-90ABN-CW	31
TRK-PNT2711FOK-90ABN-NW	31
TRK-PNT2711FOK-90ABN-WW	31
TRK-SWT140WT-CW	22
TRK-SWT140WT-NW	22
TRK-SWT140WT-WW	22
TRK-SWT20-140WT-CW	23
TRK-SWT20-140WT-NW	23
TRK-SWT20-140WT-WW	23
XC110WT-CW	6
XC110WT-NW	6
XC110WT-WW	6
XC140WT-CW	6
XC140WT-NW	6
XC140WT-WW	6
XC190WT-CW	6
XC190WT-NW	6
XC190WT-WW	6
XC2102PIR-WT-CW	19
XC2102PIR-WT-NW	19
XC2102PIR-WT-WW	19
XC210WT-CW	8
XC210WT-NW	8
XC210WT-WW	8
XC2402PIR-WT-CW	19
XC2402PIR-WT-NW	19
XC2402PIR-WT-WW	19
XC240WT-CW	8
XC240WT-NW	8
XC240WT-WW	8
XC2902PIR-WT-CW	19
XC2902PIR-WT-NW	19
XC2902PIR-WT-WW	19
XC290WT-CW	8
XC290WT-NW	8
XC290WT-WW	8
XC310WT-CW	10
XC310WT-NW	10
XC310WT-WW	10

Index

Model	Page
XC340WT-CW	10
XC340WT-NW	10
XC340WT-WW	10
XC380WT-CW	11
XC380WT-NW	11
XC380WT-WW	11
XC380WT-CW	11
XC380WT-NW	11
XC380WT-WW	11
XC384WT-CW	11
XC384WT-NW	11
XC384WT-WW	11
XC389WT-CW	11
XC389WT-NW	11
XC389WT-WW	11
XC390WT-CW	10
XC390WT-NW	10
XC390WT-WW	10
XC410WT-CW	12
XC410WT-NW	12
XC410WT-WW	12
XC440WT-CW	12
XC440WT-NW	12
XC440WT-WW	12
XC490WT-CW	12
XC490WT-NW	12
XC490WT-WW	12
XC510WT-CW	13
XC510WT-NW	13
XC510WT-WW	13
XC540WT-CW	13
XC540WT-NW	13
XC540WT-WW	13
XC590WT-CW	13
XC590WT-NW	13
XC590WT-WW	13
XC610-35WT-CW	14
XC610-35WT-NW	14
XC610-35WT-WW	14
XC610-45BK-CW	16
XC610-45BK-NW	16
XC610-45BK-WW	16

Model	Page
XC640-35WT-CW	14
XC640-35WT-NW	14
XC640-35WT-WW	14
XC640-45BK-CW	16
XC640-45BK-NW	16
XC640-45BK-WW	16
XC810-35WT-CW	15
XC810-35WT-NW	15
XC810-35WT-WW	15
XC810-45BK-CW	17
XC810-45BK-NW	17
XC810-45BK-WW	17
XC8112-35WT-CW	18
XC8112-35WT-NW	18
XC8112-35WT-WW	18
XC840-35WT-CW	15
XC840-35WT-NW	15
XC840-35WT-WW	15
XC840-45BK-CW	17
XC840-45BK-NW	17
XC840-45BK-WW	17
XC8412-35WT-CW	18
XC8412-35WT-NW	18
XC8412-35WT-WW	18
XC890-35WT-CW	15
XC890-35WT-NW	15
XC890-35WT-WW	15
XC890-45BK-CW	17
XC890-45BK-NW	17
XC890-45BK-WW	17
XC8912-35WT-CW	18
XC8912-35WT-NW	18
XC8912-35WT-WW	18

www.xplendid.com

歡迎上網詢價

Subsidiary offices and showrooms:

Singapore

Xplendid Co., Pte. Ltd.

No. 8 Burn Road #01-02 Trivex Singapore 369977

T +65 6509 0181

F +65 6509 0793

E xplendid888@gmail.com

Taipei, Taiwan

4W Space 康萊 內湖概念店

4th Fl., No. 185, Xinhu 1st Rd., Neihu Dist., Taipei, Taiwan

台北市內湖區新湖一路 185 號4樓

T 02 8791 0997

F 02 8791 0997

E tw@fourwinds.com.tw

fourwinds

康萊興業股份有限公司

FOUR WINDS CORPORATION

11072 台北市基隆路一段176號12樓

12th Fl., No.176, Keelung Rd. Sec.1

Taipei 11072, Taiwan

T +886-2-2768-8389

F +886-2-2768-7955~7

E fw@fourwinds.com.tw